

Short pitch precision roller chains(A series)
A系列短节距精密滚子链 01

Short pitch precision roller chains(B series)
B系列短节距精密滚子链 02

Heavy duty series roller chains
加重系列滚子链 03

Cottered type short pitch precision roller chains (A series)
A系列开口销型短节距精密滚子链 04

Heavy duty series cottered type roller chains
加重系列开口销型滚子链 05

Zinc-plated roller chains
镀锌滚子链 06

Nickel-plated roller chains
镀镍滚子链 06

Dacromet-plated chains
达克罗链 07

Stainless steel roller chains
不锈钢滚子链 07

Side Bow chains
侧弯链 08

Side Bow chains for pushing window
推窗用侧弯链 08

Anti-Side Bow chains for pushing window
推窗用防弯链 08

Self-lubrication roller chains
自润滑滚子链 09

Self-tooth-forming chains(Pl.V.chains)
PIV无级变速链 09

Silent chains
齿形链 10

Heavy-duty cranked-link transmission chains
重载弯板传动链 11

Steelchains for Sewage Disposal
钢制污水处理链条 11

Oil field chains
石油链 12

Coupling chains
联轴器链 13

Other simplex roller chains
其它单排滚子链 13

Double pitch transmission chains
双节距传动链 14

Double pitch conveyor chain attachments
双节距输送链附件 14

Motorcycle chains
摩托车链 15

Engine mechanism chains (Timing chains)
发动机链(正时链) 16

Leaf chains
板式链 17~19

Selection of lubrications
润滑选择 20

杭州永昌链传动有限公司是杭州永昌传动机械的下属公司，专业从事各类标准和非标链条的研发、设计、生产和经营。主要产品包括A、B系列标准滚子链、套筒链、双节距链、倍速链、空心销轴链、模锻易拆链、悬挂输送链、带各式附件的输送链以及其他各种用途的特种链条，可以根据用户要求镀镍、镀锌等。公司的特色和优势是为客户定做各类非标链条。

应用设备及行业包括食品机械、工程机械、农用机械、木工机械、包装设备、造纸设备、烟草设备、医疗设备、立体停车设备、输送设备、电梯扶梯链条、水库及污水处理链条。

材料选用优质合金钢，并经先进热处理方法处理，各道工序有严格的质量体系保证。产品符合ISO及ANSI、BS、DIN、JIS标准，产品性能达到欧、美、日等发达国家用户要求，并有多年出口经验。

杭州永昌传动机械专业从事传动件的设计、生产、经营。生产和经营的产品包括各类减速机，标准与非标链条、链轮、齿轮、齿条、皮带和皮带轮、锥套、联轴器、万向节、同步带和同步带轮、涨紧套、电机导轨、扭力限制器、蜗轮蜗杆、电机等，并可按客户要求定制各类机械零部件。

我们拥有先进的生产设备，一流的研发能力和广泛的营销网络，旨在为客户提供一站式的动力传动解决方案，并成为优秀的工业零部件供应商。坚持以质量和服务为导向，为客户提供稳定可信赖的品质，有竞争力的价格和及时的交货期。

Powerdrive China Manufacturing Co., Ltd. is member of PowerDrive TransTech (China) Group. It's a young and dynamic manufacturer of various chains.

We specialize in the chains made to customers' drawings and specification. Our advantage is reliable quality, competitive price, prompt delivery and good service.


Standard products include various transmission and conveyor chains, like Roller Chain, double pitch Conveyor Chain, Hollow Pin Chain, Leaf Chain, Table Top Chain, Side Bow Chain, Lumber Chain, Agriculture Chain, Silent Chain, PIV Chain, Stainless Steel Chain, Nickel/ Zinc plated Chain, Dacromet Chain, Engineering Chain, Steel Pintle Chain, Welded steel chain, Forged chain, Malleable Iron chain, and many other types. Different kinds of attachment are available.

We also supply chain components like roller, bushing, pin and turned parts for the OEM chain manufacturer over the world.

Our chains are widely used for various industries, such as conveyor system, agriculture, metallurgy, food and beverage, processing, Palm Oil, Water and Waste water and forest industry, etc.

we keep investing on R&D, equipment, Human Resource, to be leader of industry.

PowerDrive TransTech (China) Group is in the position to supply various transmission parts and other OEM parts make to customers' drawings.

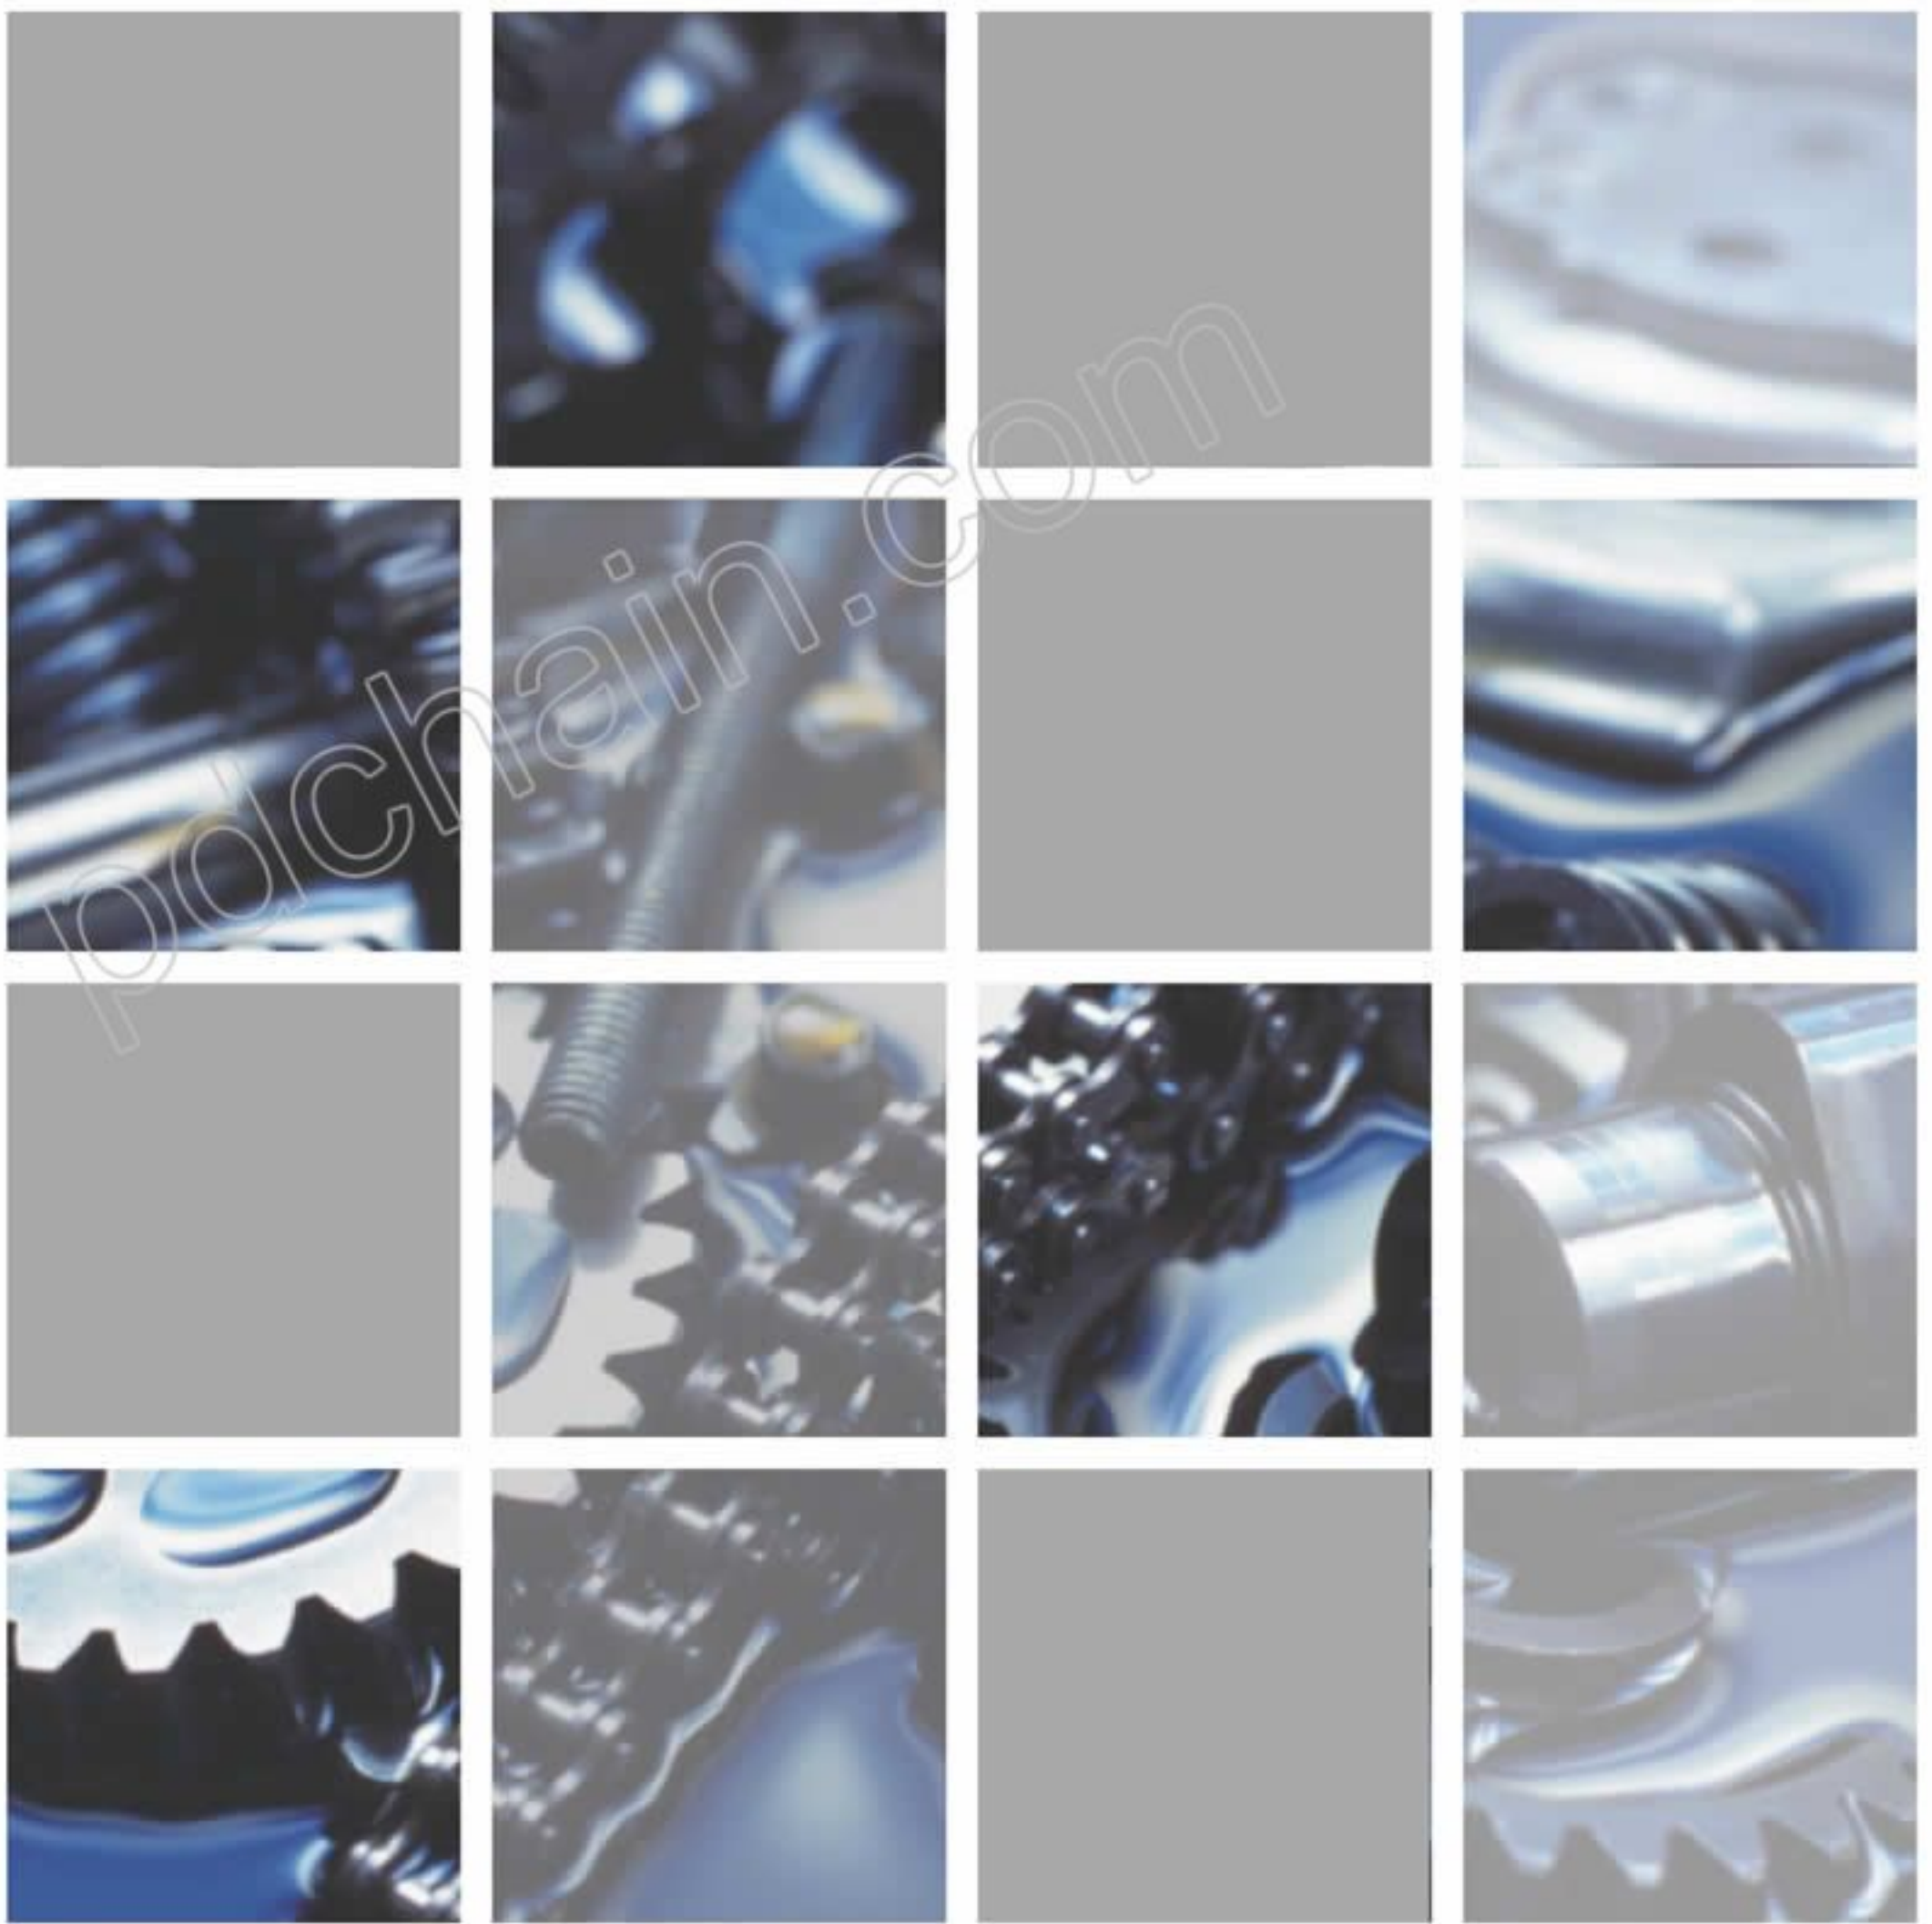


杭州永昌链传动有限公司

Hangzhou Powerdrive Chain Manufacturing Co.,Ltd.

博采众长精益求精


Short pitch precision roller chains(A series) A系列短节距精密滚子链

Simplex roller chains & bushing chains 单排滚子链 套筒链

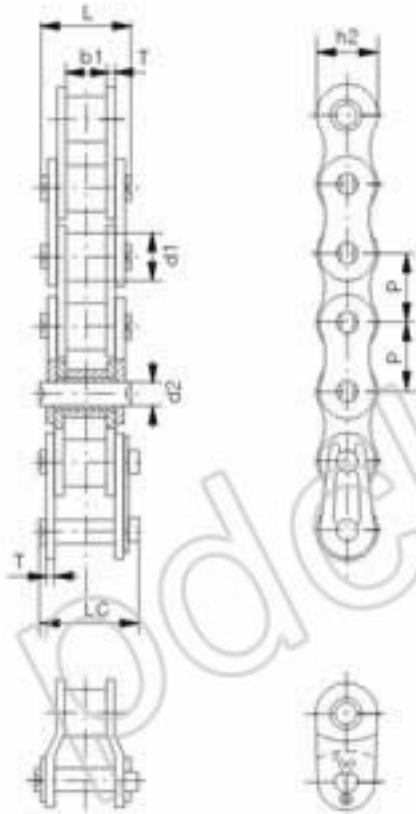


DIN/ISO 链号	ANSI 链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米重量 Weight per meter
DIN/ISO Chain No.	ANSI Chain No.	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Qo	q
		mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
*04C-1	*25	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50	4.6	0.15
*06C-1	*35	9.525	5.08	4.77	3.58	12.30	13.17	8.70	1.30	7.90	10.8	0.33
085-1	41	12.700	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.67	12.6	0.41
08A-1	40	12.700	7.95	7.65	3.96	16.60	17.80	12.00	1.50	14.10	17.5	0.62
10A-1	50	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20	29.4	1.02
12A-1	60	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80	41.5	1.50
16A-1	80	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70	69.4	2.60
20A-1	100	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50	109.2	3.91
24A-1	120	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00	156.3	5.62
28A-1	140	44.450	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40	212.0	7.50
32A-1	160	50.800	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80	278.9	10.10
36A-1	180	57.150	35.71	35.48	17.46	72.80	78.60	53.60	7.20	280.20	341.8	13.45
40A-1	200	63.500	39.68	37.85	19.85	80.30	87.20	60.00	8.00	353.80	431.6	16.15
48A-1	240	76.200	47.63	47.35	23.81	95.50	103.00	72.39	9.50	510.30	622.5	23.20

Duplex roller chains & bushing chains 双排滚子链 套筒链

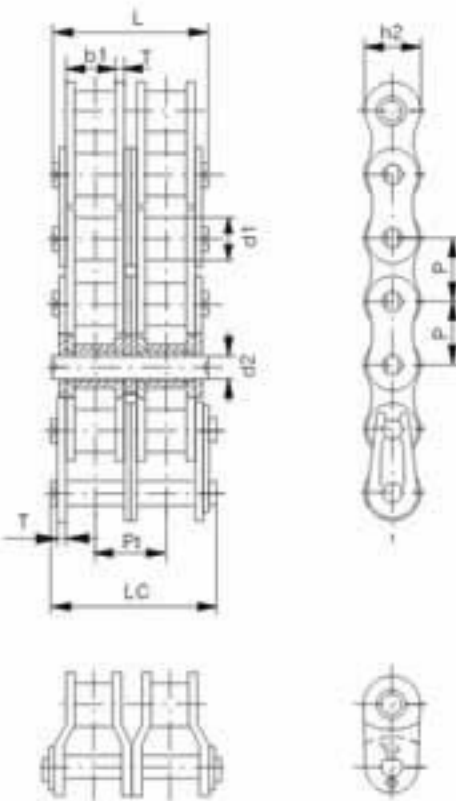

DIN/ISO 链号	ANSI 链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米重量 Weight per meter
DIN/ISO Chain No.	ANSI Chain No.	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Pt	Q min	Qo	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
*04C-2	*25-2	6.350	3.30	3.18	2.31	14.5	15.0	6.00	0.80	6.4	7.00	8.6	0.28
*06C-2	*35-2	9.525	5.08	4.77	3.58	22.2	23.3	8.70	1.30	10.13	15.80	19.7	0.63
085-2	41-2	12.700	7.77	6.25	3.58	25.7	26.9	9.91	1.30	11.95	13.34	16.9	0.81
08A-2	40-2	12.700	7.95	7.65	3.96	31.0	32.2	12.00	1.50	14.38	28.20	35.9	1.12
10A-2	50-2	15.875	10.16	9.40	5.08	38.8	40.4	15.09	2.03	18.11	44.40	58.1	2.00
12A-2	60-2	19.050	11.91	12.57	5.94	48.8	50.5	18.00	2.42	22.78	63.60	82.1	2.92
16A-2	80-2	25.400	15.88	15.75	7.92	62.0	64.3	24.00	3.25	29.29	113.40	141.8	5.15
20A-2	100-2	31.750	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.00	219.4	7.80
24A-2	120-2	38.100	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.00	314.9	11.70
28A-2	140-2	44.450	25.40	25.22	12.70	103.3	107.9	41.00	5.60	48.87	344.80	427.5	15.14
32A-2	160-2	50.800	28.58	31.55	14.27	123.3	128.1	47.80	6.40	58.55	453.60	562.4	20.14
36A-2	180-2	57.150	35.71	35.48	17.46	138.6	144.4	53.60	7.20	65.84	560.50	695.0	29.22
40A-2	200-2	63.500	39.68	37.85	19.85	151.9	158.8	60.00	8.00	71.55	707.60	877.4	32.24
48A-2	240-2	76.200	47.63	47.35	23.81	183.4	190.8	72.39	9.50	87.38	1020.60	1255.3	45.23

Triplex roller chains & bushing chains 三排滚子链 套筒链

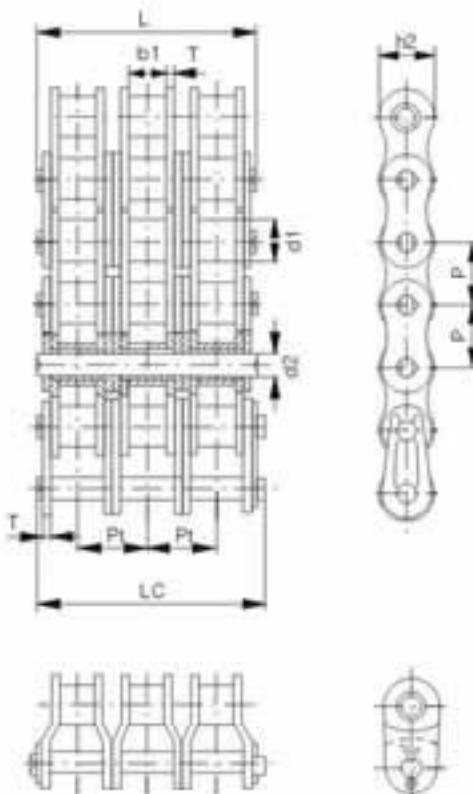


DIN/ISO 链号	ANSI 链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米重量 Weight per meter
DIN/ISO Chain No.	ANSI Chain No.	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Pt	Q min	Qo	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
*04C-3	*25-3	6.350	3.30	3.18	2.31	21.0	21.5	6.00	0.80	6.40	10.5	12.6	0.44
*06C-3	*35-3	9.525	5.08	4.77	3.58	32.8	33.5	8.70	1.30	10.13	23.7	28.6	1.05
08A-3	40-3	12.70	7.95	7.65	3.96	45.4	46.6	12.00	1.50	14.38	42.3	50.0	1.90
10A-3	50-3	15.875	10.16	9.40	5.08	56.9	58.5	15.09	2.03	18.11	66.6	77.8	3.09
12A-3	60-3	19.05	11.91	12.57	5.94	71.6	73.3	18.00	2.42	22.78	95.4	111.1	4.54
16A-3	80-3	25.40	15.88	15.75	7.92	91.3	93.6	24.00	3.25	29.29	170.1	196.4	7.89
20A-3	100-3	31.75	19.05	18.90	9.53	112.2	118.3	30.00	4.00	35.76	265.5	309.6	11.77
24A-3	120-3	38.10	22.23	25.22	11.10	141.1	145.2	35.70	4.80	45.44	381.0	437.2	17.53
28A-3	140-3	44.45	25.40	25.22	12.70	152.2	156.8	41.00	5.60	48.87	517.2	593.3	22.20
32A-3	160-3	50.80	28.58	31.55	14.27	181.8	186.6	47.80	6.40	58.55	680.4	780.6	30.02
36A-3	180-3	57.15	35.71	35.48	17.46	204.4	210.2	53.60	7.20	65.84	840.7	983.6	38.22
40A-3	200-3	63.50	39.68	37.85	19.85	223.5	230.4	60.00	8.00	71.55	1061.4	1217.8	49.03
48A-3	240-3	76.20	47.63	47.35	23.81	271.3	278.6	72.39	9.50	87.83	1530.9	1756.5	71.60

*套筒链: 表中滚子直径d1为套筒直径

*Bushing chain: d1 in the table indicate the external diameter of the bush.


Short pitch precision roller chains(B series) B系列短节距精密滚子链

Simplex roller chains 单排滚子链

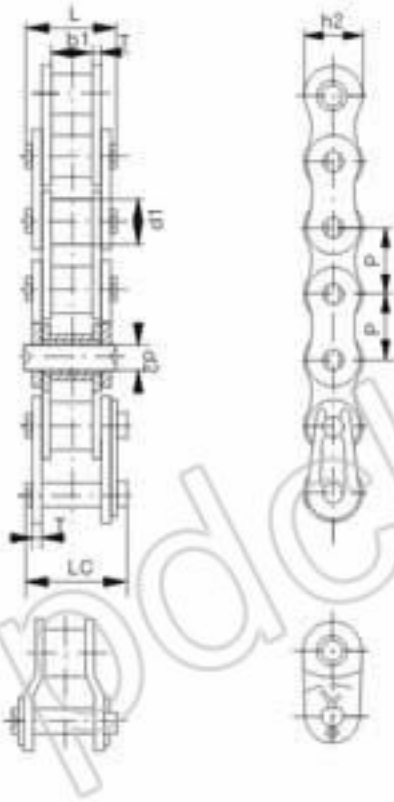


DIN/ISO 链号 DIN/ISO Chain No.	节距 Pitch P	滚子直径 Roller diameter d1 max	内节内宽 Width between inner plates b1 min	销轴直径 Pin diameter d2 max	销轴长度 Pin length		内链板高度 Inner plate depth h2 max	链板厚度 Plate thickness T max	极限拉伸载荷 Ultimate tensile strength Q min	平均拉伸载荷 Average tensile strength Qe	每米长重 Weight per meter q
					L max	Lc max					
					mm	mm					
04B-1	6000	4.00	2.80	1.95	7.6	8.2	5.00	0.80	3.0	3.2	0.11
05B-1	8000	5.00	3.00	2.31	7.90	8.40	7.10	0.80	5.0	5.9	0.20
*06B-1	9525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	9.0	10.4	0.41
08B-1	12700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.0	19.4	0.69
10B-1	15875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.4	27.5	0.93
12B-1	19050	12.07	11.68	5.72	22.50	24.2	16.00	1.85	29.0	32.2	1.15
16B-1	25400	15.88	17.02	8.28	36.10	37.4	21.00	4.15/3.1	60.0	72.8	2.71
20B-1	31750	19.05	19.56	10.19	41.30	45.0	26.40	4.5/3.5	95.0	106.7	3.70
24B-1	38100	25.40	25.40	14.63	53.40	57.8	33.20	6.0/4.8	160.0	178.0	7.10
28B-1	44450	27.94	30.99	15.90	65.10	69.5	36.90	7.5/6.0	200.0	222.0	8.50
32B-1	50800	29.21	30.99	17.81	66.00	71.0	42.10	7.0/6.0	250.0	277.5	10.25
40B-1	63500	39.37	38.10	22.89	82.20	89.2	52.96	8.5/8.0	355.0	394.0	16.35
48B-1	76200	48.26	45.72	29.24	99.10	107.0	63.80	12.0/10.0	560.0	621.6	25.00
56B-1	88900	53.98	53.34	34.32	114.6	123.0	77.80	13.5/12.0	850.0	940.0	35.78
64B-1	10160	63.50	60.96	39.40	130.0	138.5	90.17	15.0/13.0	1120.0	1240.0	46.00
72B-1	11430	72.39	68.58	44.48	147.4	156.4	103.60	17.0/15.0	1400.0	1550.0	60.80

Duplex roller chains & bushing chains 双排滚子链

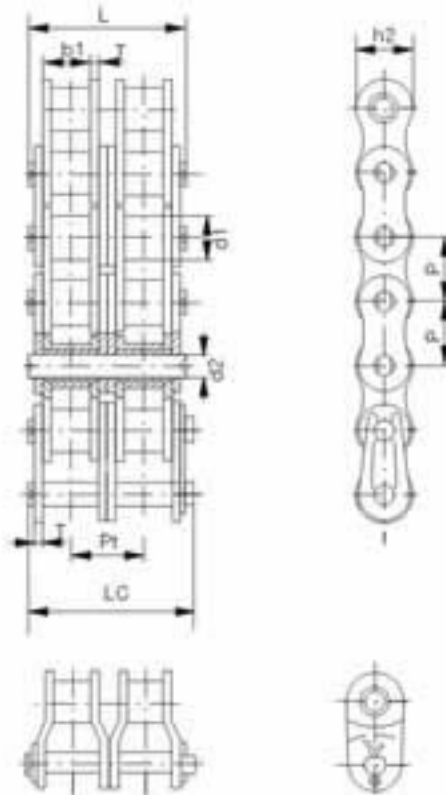

DIN/ISO 链号 DIN/ISO Chain No.	节距 Pitch P	滚子直径 Roller diameter d1 max	内节内宽 Width between inner plates b1 min	销轴直径 Pin diameter d2 max	销轴长度 Pin length		内链板高度 Inner plate depth h2 max	链板厚度 Plate thickness T max	排距 Transverse pitch Pt	极限拉伸载荷 Ultimate tensile strength Q min	平均拉伸载荷 Average tensile strength Qe	每米长重 Weight per meter q
					L max	Lc max						
					mm	mm						
05B-2	8000	5.00	3.00	2.31	13.75	14.25	7.10	0.80	5.64	7.8	10.2	0.33
*06B-2	9525	6.35	5.72	3.28	23.4	24.4	8.20	1.30	10.24	16.9	18.7	0.77
08B-2	12700	8.51	7.75	4.45	31.2	32.2	11.80	1.60	13.92	32.0	38.7	1.34
10B-2	15875	10.16	9.65	5.08	36.1	37.5	14.70	1.70	16.59	44.5	56.2	1.84
12B-2	19050	12.07	11.68	5.72	42.0	43.6	16.00	1.85	19.46	57.8	66.1	2.31
16B-2	25400	15.88	17.02	8.28	68.0	69.3	21.00	4.15/3.1	31.88	106.0	133.0	5.42
20B-2	31750	19.05	19.56	10.19	77.8	81.5	26.40	4.5/3.5	36.45	170.0	211.2	7.20
24B-2	38100	25.40	25.40	14.63	101.7	106.2	33.20	6.0/4.8	48.36	260.0	319.2	13.40
28B-2	44450	27.94	30.99	15.90	124.6	128.9	36.90	7.5/6.0	59.56	360.0	406.8	16.60
32B-2	50800	29.21	30.99	17.81	124.6	129.4	42.10	7.0/6.0	58.55	450.0	508.5	21.00
40B-2	63500	39.37	38.10	22.89	154.5	161.5	52.96	8.5/8.0	72.29	630.0	711.9	32.00
48B-2	76200	48.26	45.72	29.24	190.4	198.2	63.80	12.0/10.0	91.21	1000.0	1130.0	50.00
56B-2	88900	53.98	53.34	34.32	221.2	229.6	77.80	13.5/12.0	106.6	1600.0	1760.0	71.48
64B-2	10160	63.50	60.96	39.40	248.9	258.4	90.17	15.0/13.0	119.89	2000.0	2200.0	91.00
72B-2	11430	72.39	68.58	44.48	263.7	292.7	103.60	17.0/15.0	136.27	2500.0	2750.0	120.40


Triplex roller chains & bushing chains 三排滚子链

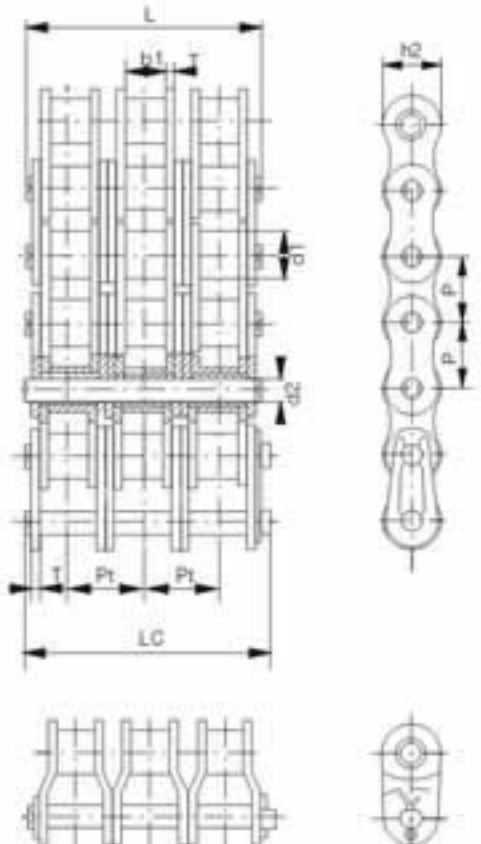

DIN/ISO 链号 DIN/ISO Chain No.	节距 Pitch P	滚子直径 Roller diameter d1 max	内节内宽 Width between inner plates b1 min	销轴直径 Pin diameter d2 max	销轴长度 Pin length		内链板高度 Inner plate depth h2 max	链板厚度 Plate thickness T max	排距 Transverse pitch Pt	极限拉伸载荷 Ultimate tensile strength Q min	平均拉伸载荷 Average tensile strength Qe	每米长重 Weight per meter q
					L max	Lc max						
					mm	mm						
05B-3	8000	5.00	3.00	2.31	19.4	19.9	7.10	0.80	5.64	11.1	13.8	0.48
*06B-3	9525	6.35	5.72	3.28	33.5	34.6	8.20	1.30	10.24	24.9	30.1	1.16
08B-3	12700	8.51	7.75	4.45	45.1	46.1	11.80	1.60	13.92	47.5	57.8	2.03
10B-3	15875	10.16	9.65	5.08	52.7	54.1	14.70	1.70	16.59	66.7	84.5	2.77
12B-3	19050	12.07	11.68	5.72	61.5	63.1	16.00	1.85	19.46	86.7	101.8	3.46
16B-3	25400	15.88	17.02	8.28	99.8	101.2	21.00	4.15/3.1	31.88	160.0	203.7	8.13
20B-3	31750	19.05	19.56	10.19	114.2	117.9	26.40	4.5/3.5	36.45	250.0	290.0	10.82
24B-3	38100	25.40	25.40	14.63	150.1	154.6	33.20	6.0/4.8	48.36	425.0	493.0	20.10
28B-3	44450	27.94	30.99	15.90	184.2	188.7	36.90	7.5/6.0	59.56	530.0	609.5	24.92
32B-3	50800	29.21	30.99	17.81	183.1	188.0	42.10	7.0/6.0	58.55	670.0	770.5	31.56
40B-3	63500	39.37	38.10	22.89	226.8	233.8	52.96	8.5/8.0	72.29	950.0	1092.5	48.10
48B-3	76200	48.26	45.72	29.24	281.6	289.4	63.80	12.0/10.0	91.21	1500.0	1710.0	75.00
56B-3	88900	53.98	53.34	34.32	327.8	336.2	77.80	13.5/12.0	106.6	2240.0	2240.0	107.18
64B-3	10160	63.50	60.96	39.40	369.8	378.3	90.17	15.0/13.0	119.89	3000.0	3300.0	136.00
72B-3	11430	72.39	68.58	44.48	420.0	429.0	103.60	17.0/15.0	136.27	3750.0	4125.0	180.00

*Straight side plates *直链板

■ Heavy duty series roller chains 加重系列滚子链

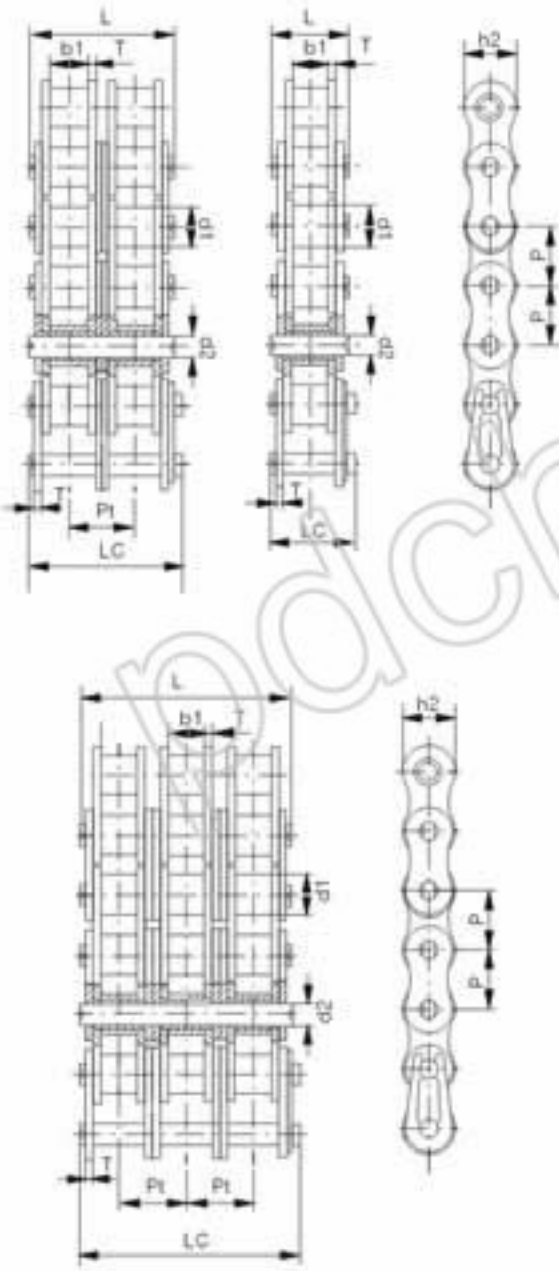


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米重量 Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
	135H	9525	5.08	4.77	3.58	133	143	8.7	1.5		7.9	10.8	0.41
08AH-1	40H	12700	7.95	7.85	3.96	188	199	12.00	2.03		14.1	19.1	0.82
10AH-1	50H	15875	10.16	9.40	5.08	221	234	15.09	2.42		22.2	30.2	1.25
12AH-1	60H	19050	11.91	12.57	5.94	292	31.0	18.00	3.25		31.8	42.7	1.87
16AH-1	80H	25400	15.88	15.75	7.92	362	37.7	24.00	4.00		56.7	71.4	3.10
20AH-1	100H	31750	19.05	18.90	9.53	438	48.0	30.00	4.80		88.5	112.4	4.52
24AH-1	120H	38100	22.23	25.22	11.10	533	57.5	35.70	5.60		127.0	160.9	6.60
28AH-1	140H	44450	25.40	25.22	12.70	57.6	62.2	41.00	6.40		172.4	217.3	8.30
32AH-1	160H	50800	28.58	31.55	14.27	68.2	73.0	47.80	7.20		226.8	285.8	10.30
40AH-1	200H	63500	39.68	37.85	19.85	86.6	93.5	60.00	9.50		353.8	444.5	19.16
12AH-2	60H-2	19050	11.91	12.57	5.94	55.3	57.1	18.00	3.25	26.11	63.6	84.5	3.71
16AH-2	80H-2	25400	15.88	15.75	7.92	68.8	70.3	24.00	4.00	32.59	113.4	146.5	6.15
20AH-2	100H-2	31750	19.05	18.90	9.53	82.7	86.0	30.00	4.80	39.09	177.0	225.9	9.03
24AH-2	120H-2	38100	22.23	25.22	11.10	102.4	106.4	35.70	5.60	48.87	254.0	322.7	13.13
28AH-2	140H-2	44450	25.40	25.22	12.70	109.8	114.4	41.00	6.40	52.20	344.8	437.7	16.60
32AH-2	160H-2	50800	28.58	31.55	14.27	130.1	134.9	47.80	7.20	61.90	453.6	571.6	20.20
40AH-2	200H-2	63500	39.68	37.85	19.85	164.9	171.8	60.00	9.50	78.31	707.6	894.9	38.11
12AH-3	60H-3	19050	11.91	12.57	5.94	81.4	83.2	18.00	3.25	26.11	95.4	113.9	5.54
16AH-3	80H-3	25400	15.88	15.75	7.92	101.4	102.9	24.00	4.00	32.59	170.1	203.5	9.42
20AH-3	100H-3	31750	19.05	18.90	9.53	121.8	125.1	30.00	4.80	39.09	265.5	314.8	12.96
24AH-3	120H-3	38100	22.23	25.22	11.10	151.2	155.2	35.70	5.60	48.87	381.0	444.7	19.64
28AH-3	140H-3	44450	25.40	25.22	12.70	162.0	168.6	41.00	6.40	52.20	517.2	598.4	24.90
32AH-3	160H-3	50800	28.58	31.55	14.27	192.0	196.8	47.80	7.20	61.90	680.4	787.3	30.10
40AH-3	200H-3	63500	39.68	37.85	19.85	243.2	250.1	60.00	9.50	78.31	1061.4	1228.2	57.06

*Bushing chain:d1 in the table indicate the external diameter of the bushing.

*套筒链：表中滚子直径d1为套筒直径

■ SH series high strength short pitch roller chains SH系列高强度短节距滚子链

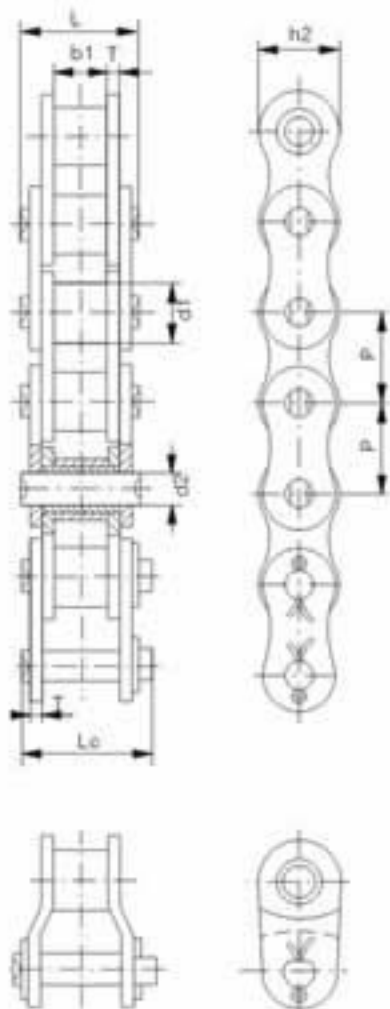


SH series roller chains have a greater ultimate tensile strength (about an additional 25 - 30%) over ANSI standard roller chains by using through hardened pins, these chains also provide a greater shock load resistance, The dimensions of the chain are identical to ANSI heavy series standard roller chains.

SH系列滚子链通过销轴整体淬硬其极限拉伸载荷比A系列标准滚子链增加约25% - 30%，并能提供较高的抗震动负载，参数尺寸与加重系列滚子链相同。

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
40SH	12700	7.95	7.85	3.96	18.8	19.9	12.00	2.03	22.4	24.8	0.82
50SH	15875	10.16	9.40	5.08	22.1	23.4	15.09	2.42	30.4	36.2	1.25
60SH	19050	11.91	12.57	5.94	29.2	31.6	18.00	3.25	44.1	50.4	1.87
80SH	25400	15.88	15.75	7.92	36.2	37.7	24.00	4.00	88.2	93.0	3.10
100SH	31750	19.05	18.90	9.53	43.8	46.9	30.00	4.80	116.6	129.1	4.52
120SH	38100	22.23	25.22	11.10	53.5	57.5	35.70	5.60	158.2	175.3	6.60
140SH	44450	25.40	25.22	12.70	57.6	62.2	41.00	6.40	206.0	266.5	8.30
160SH	50800	28.58	31.55	14.27	68.2	73.0	47.80	7.20	274.0	293.0	10.30


■ Cottered type short pitch precision roller chains (A series) A系列开口销型短节精密滚子链

Simplex roller chains 单排滚子链

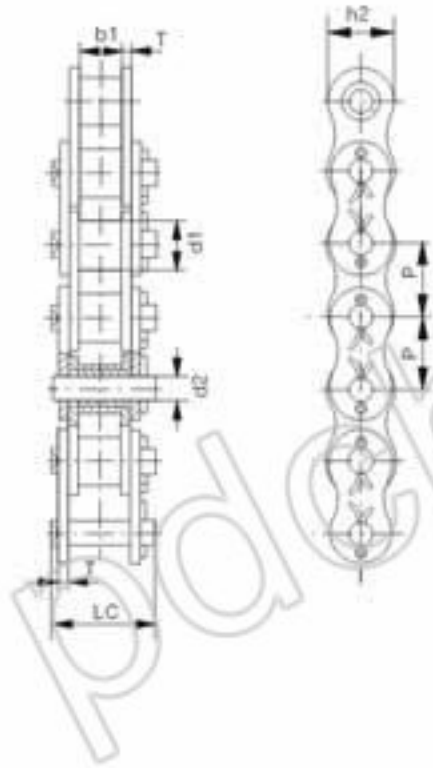


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch p	滚子直径 Roller diameter d1 max	内节内宽 Width between inner plates b1 min	销轴直径 Pin diameter d2 max	销轴长度 Pin length Lc max	内链板高度 Inner plate depth h2 max	链板厚度 Plate thickness T max	排距 Transverse pitch Pt	极限拉伸载荷 Ultimate tensile strength Q min	平均拉伸载荷 Average tensile strength Qs	每米重量 Weight per meter q
10A-1	50	15.875	10.16	9.40	5.08	23.3	15.09	2.03		22.2	29.4	1.02
12A-1	60	19.050	11.91	12.57	5.94	28.3	18.00	2.42		31.8	41.5	1.50
16A-1	80	25.400	15.88	15.75	7.92	35.9	24.00	3.25		58.7	69.4	2.60
20A-1	100	31.750	19.05	18.90	9.53	44.7	30.00	4.00		88.5	109.2	3.91
24A-1	120	38.100	22.23	25.22	11.10	54.3	35.70	4.80		127.0	156.3	5.62
28A-1	140	44.450	25.40	25.22	12.70	59.0	41.00	5.60		172.4	212.0	7.50
32A-1	160	50.800	28.58	31.55	14.27	69.6	47.80	6.40		226.8	278.9	10.10
36A-1	180	57.150	35.71	35.48	17.46	78.6	53.60	7.20		280.2	341.8	13.45
40A-1	200	63.500	39.68	37.85	19.85	87.2	60.00	8.00		353.8	431.6	16.15
48A-1	240	76.200	47.63	47.35	23.81	103.0	72.39	9.50		510.3	622.5	23.20

Duplex roller chains 双排滚子链

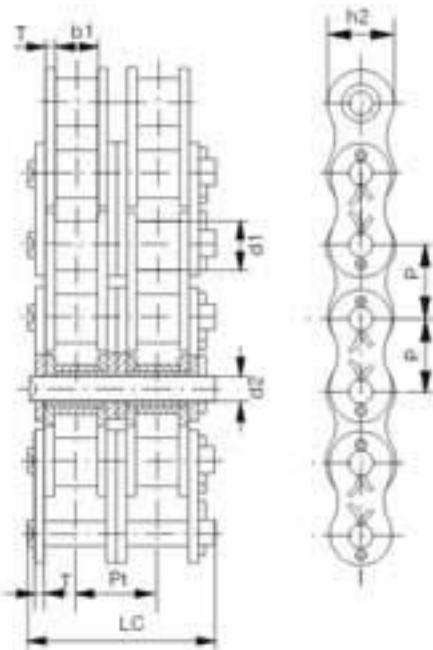


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch p	滚子直径 Roller diameter d1 max	内节内宽 Width between inner plates b1 min	销轴直径 Pin diameter d2 max	销轴长度 Pin length Lc max	内链板高度 Inner plate depth h2 max	链板厚度 Plate thickness T max	排距 Transverse pitch Pt	极限拉伸载荷 Ultimate tensile strength Q min	平均拉伸载荷 Average tensile strength Qs	每米重量 Weight per meter q
10A-2	50-2	15.875	10.16	9.40	5.08	41.2	15.09	2.03	18.11	44.4	58.1	2.00
12A-2	60-2	19.050	11.91	12.57	5.94	51.1	18.00	2.42	22.78	63.6	82.1	2.92
16A-2	80-2	25.400	15.88	15.75	7.92	65.8	24.00	3.25	29.29	113.4	141.8	5.15
20A-2	100-2	31.750	19.05	18.90	9.53	80.5	30.00	4.00	35.76	177.0	219.4	7.60
24A-2	120-2	38.100	22.23	25.22	11.10	99.7	35.70	4.80	45.44	254.0	314.9	11.70
28A-2	140-2	44.450	25.40	25.22	12.70	107.9	41.00	5.60	48.87	344.8	427.5	15.14
32A-2	160-2	50.800	28.58	31.55	14.27	128.1	47.80	6.40	58.55	453.6	562.4	20.14
36A-2	180-2	57.150	35.71	35.48	17.46	144.4	53.60	7.20	65.84	560.5	695.0	29.22
40A-2	200-2	63.500	39.68	37.85	19.85	158.8	60.00	8.00	71.55	707.6	877.4	32.24
48A-2	240-2	76.200	47.63	47.35	23.81	190.8	72.39	9.50	87.83	1020.6	1255.3	45.23

Triplex roller chains 三排滚子链

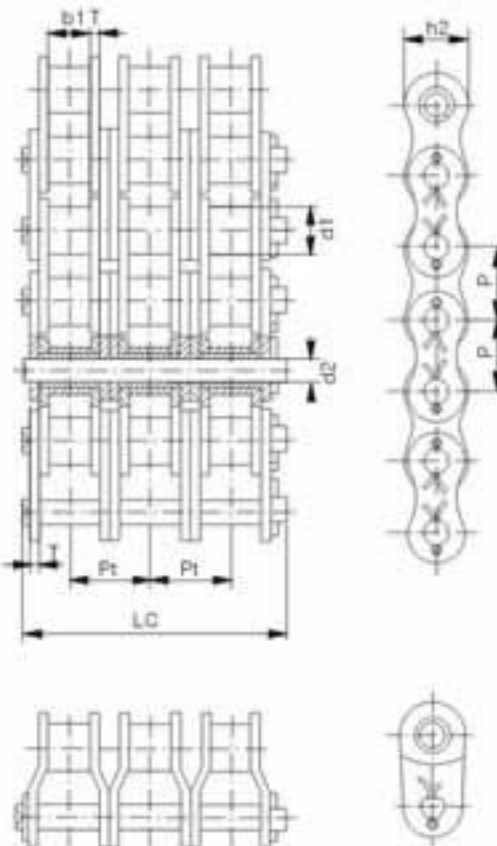


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch p	滚子直径 Roller diameter d1 max	内节内宽 Width between inner plates b1 min	销轴直径 Pin diameter d2 max	销轴长度 Pin length Lc max	内链板高度 Inner plate depth h2 max	链板厚度 Plate thickness T max	排距 Transverse pitch Pt	极限拉伸载荷 Ultimate tensile strength Q min	平均拉伸载荷 Average tensile strength Qs	每米重量 Weight per meter q
10A-3	50-3	15.875	10.16	9.40	5.08	59.3	15.09	2.03	18.11	66.6	77.8	3.09
12A-3	60-3	19.050	11.91	12.57	5.94	73.9	18.00	2.42	22.78	95.4	111.1	4.54
16A-3	80-3	25.400	15.88	15.75	7.92	95.1	24.00	3.25	29.29	170.1	198.4	7.89
20A-3	100-3	31.750	19.05	18.90	9.53	116.3	30.00	4.00	35.76	265.5	309.6	11.77
24A-3	120-3	38.100	22.23	25.22	11.10	145.2	35.70	4.80	45.44	381.0	437.2	17.53
28A-3	140-3	44.450	25.40	25.22	12.70	156.8	41.00	5.60	48.87	517.2	583.3	22.20
32A-3	160-3	50.800	28.58	31.55	14.27	186.6	47.80	6.40	58.55	680.4	780.6	30.02
36A-3	180-3	57.150	35.71	35.48	17.46	210.2	53.60	7.20	65.84	840.7	983.6	38.22
40A-3	200-3	63.500	39.68	37.85	19.85	230.4	60.00	8.00	71.55	1061.4	1217.8	49.03
48A-3	240-3	76.200	47.63	47.35	23.81	278.6	72.39	9.50	87.83	1530.9	1756.5	71.90

■ Heavy duty series cottered type roller chains 加重系列开口销型滚子链

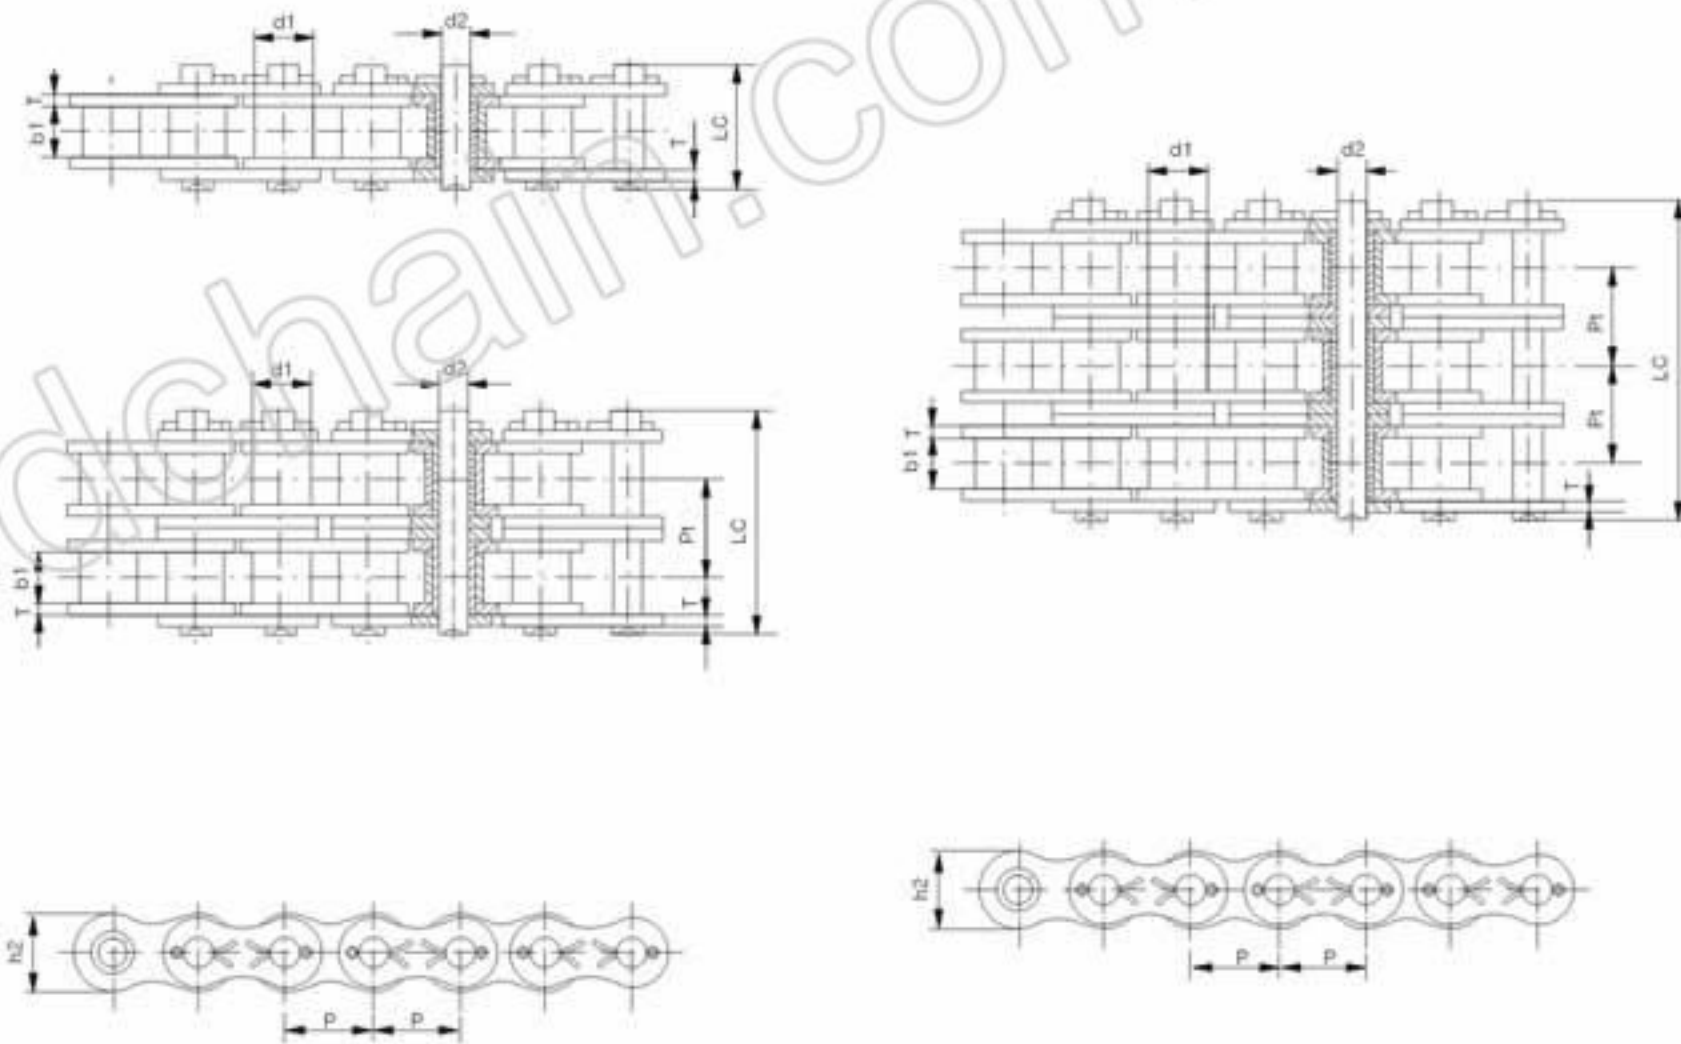

DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		p	d1 max	b1 min	d2 max	Lc max	h2 max	T max	Pt	Q min	Co	q
		mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
10AH-1	50H	15.875	10.16	9.40	5.08	24.4	15.09	2.42		22.2	30.2	1.25
12AH-1	60H	19.050	11.91	12.57	5.94	31.6	18.00	3.25		31.8	42.7	1.87
16AH-1	80H	25.400	15.88	15.75	7.92	39.4	24.00	4.00		56.7	71.4	3.10
20AH-1	100H	31.750	19.05	18.90	9.53	46.9	30.00	4.80		88.5	112.4	4.52
24AH-1	120H	38.100	22.23	25.22	11.10	57.5	35.70	5.60		127.0	160.9	6.60
28AH-1	140H	44.450	25.40	25.22	12.70	62.2	41.00	6.40		172.4	217.3	8.30
32AH-1	160H	50.800	28.58	31.55	14.27	73.0	47.80	7.20		226.8	285.8	10.30
40AH-1	200H	63.500	38.68	37.85	19.85	93.5	60.00	9.50		353.8	444.5	19.18
12AH-2	60H-2	19.050	11.91	12.57	5.94	57.7	18.00	3.25	26.11	63.6	84.5	3.71
16AH-2	80H-2	25.400	15.88	15.75	7.92	72.0	24.00	4.00	32.59	113.4	145.3	6.15
20AH-2	100H-2	31.750	19.05	18.90	9.53	86.0	30.00	4.80	39.09	177.0	225.9	9.03
24AH-2	120H-2	38.100	22.23	25.22	11.10	106.4	35.70	5.60	48.67	254.0	322.7	13.13
28AH-2	140H-2	44.450	25.40	25.22	12.70	114.4	41.00	6.40	52.20	344.8	437.7	16.60
32AH-2	160H-2	50.800	28.58	31.55	14.27	134.9	47.80	7.20	61.90	453.6	571.6	20.20
40AH-2	200H-2	63.500	38.68	37.85	19.85	171.8	60.00	9.50	78.31	707.6	894.9	38.11
12AH-3	60H-3	19.050	11.91	12.57	5.94	83.8	18.00	3.25	26.11	95.4	113.9	5.54
16AH-3	80H-3	25.400	15.88	15.75	7.92	104.5	24.00	4.00	32.59	170.1	203.5	9.42
20AH-3	100H-3	31.750	19.05	18.90	9.53	125.1	30.00	4.80	39.09	265.5	314.8	12.96
24AH-3	120H-3	38.100	22.23	25.22	11.10	155.2	35.70	5.60	48.67	381.0	444.7	19.64
28AH-3	140H-3	44.450	25.40	25.22	12.70	166.6	41.00	6.40	52.20	517.2	598.4	24.90
32AH-3	160H-3	50.800	28.58	31.55	14.27	196.8	47.80	7.20	61.90	680.4	787.3	30.10
40AH-3	200H-3	63.500	38.68	37.85	19.85	250.1	60.00	9.50	78.31	1061.4	1228.2	57.06

■ Zinc-plated roller chains 镀锌滚子链

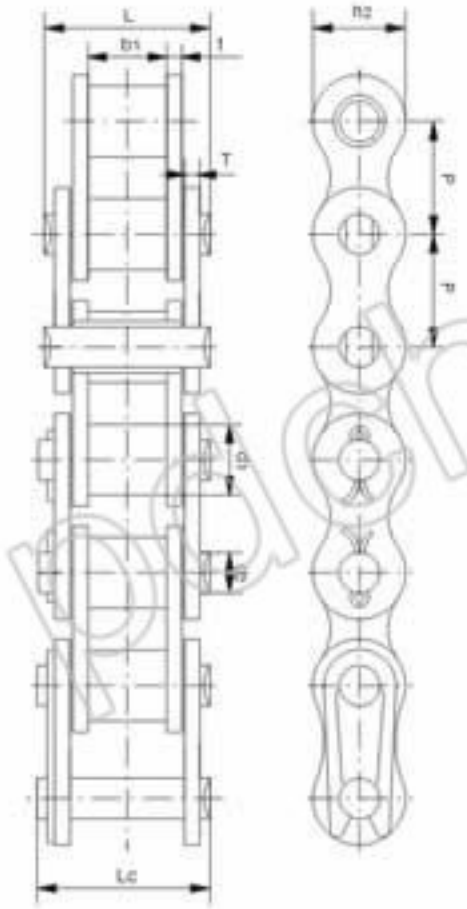


链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimensions		极限载荷 Ultimate tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*25ZP	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50	0.15
*35ZP	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90	0.33
41ZP	12.700	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.67	0.41
40ZP	12.700	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10	0.62
50ZP	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20	1.02
60ZP	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80	1.50
80ZP	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70	2.60
100ZP	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50	3.91
120ZP	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00	5.62
140ZP	44.450	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40	7.50
160ZP	50.800	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80	10.10
04BZP	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	3.00	0.11
05BZP	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	5.00	0.20
#06BZP	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	9.00	0.41
08BZP	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.00	0.69
10BZP	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.40	0.93
12BZP	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	29.00	1.15
16BZP	25.400	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	60.00	2.71
20BZP	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	95.00	3.70
24BZP	38.100	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	160.0	7.10
28BZP	44.450	27.94	30.99	15.90	65.10	69.50	36.70	7.5/6.0	200.0	8.50
32BZP	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	250.0	10.25

*Bushing chain: d1 in the table indicate the external diameter of the bushing.

*套筒链: 表中滚子直径d1为套筒直径

#Straight side plates #直链板

■ Nickel-plated roller chains 镀镍滚子链

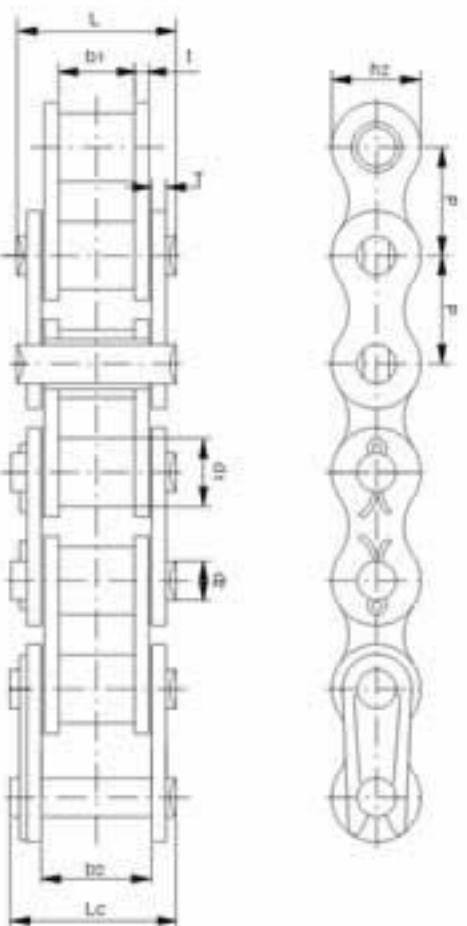


链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimensions		极限拉伸载荷 Ultimate tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*25NP	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50	0.15
*35NP	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90	0.33
40NP	12.700	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10	0.62
50NP	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20	1.02
60NP	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80	1.50
80NP	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70	2.60
100NP	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50	3.91
120NP	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00	5.62
140NP	44.450	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40	7.50
160NP	50.800	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80	10.10
04BNP	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	3.00	0.11
05BNP	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	5.00	0.20
#06BNP	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	9.00	0.41
08BNP	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.00	0.69
10BNP	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.40	0.93
12BNP	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	29.00	1.15
16BNP	25.400	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	60.00	2.71
20BNP	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	95.00	3.70
24BNP	38.100	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	160.0	7.10
28BNP	44.450	27.94	30.99	15.90	65.10	69.50	36.70	7.5/6.0	200.0	8.50
32BNP	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	250.0	10.25

*Bushing chain: d1 in the table indicate the external diameter of the bushing.

*套筒链: 表中滚子直径d1为套筒直径

#Straight side plates #直链板

■ Dacromet-plated chains 达克罗链

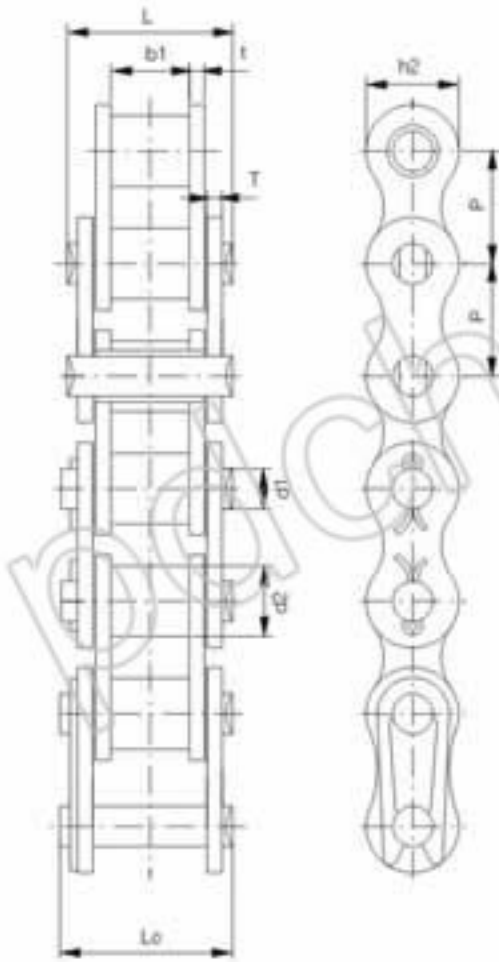


链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimensions		破断载荷 Ultimate tensile strength	每米重量 Weight per meter
	P	d _r max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*25DR	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50	0.15
*35DR	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90	0.33
40DR	12.70	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10	0.62
50DR	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20	1.02
60DR	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80	1.50
80DR	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70	2.60
100DR	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50	3.91
120DR	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00	5.62
140DR	44.450	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40	7.50
160DR	50.800	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80	10.10
04BDR	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	3.00	0.11
05BDR	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	5.00	0.20
#06BDR	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	9.00	0.41
08BDR	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.00	0.69
10BDR	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.40	0.93
12BDR	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	29.00	1.15
16BDR	25.400	15.88	17.02	8.28	38.10	37.40	21.00	4.15/3.1	60.00	2.71
20BDR	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	95.00	3.70
24BDR	38.100	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	160.0	7.10
28BDR	44.450	27.94	30.99	15.90	65.10	69.50	36.70	7.5/6.0	200.0	8.50
32BDR	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	250.0	10.25

*Bushing chain: d₁ in the table indicate the external diameter of the bushing.

*套筒链: 表中滚子直径d₁为套筒直径

#Straight side plates #直链板

■ Stainless steel roller chains 不锈钢滚子链

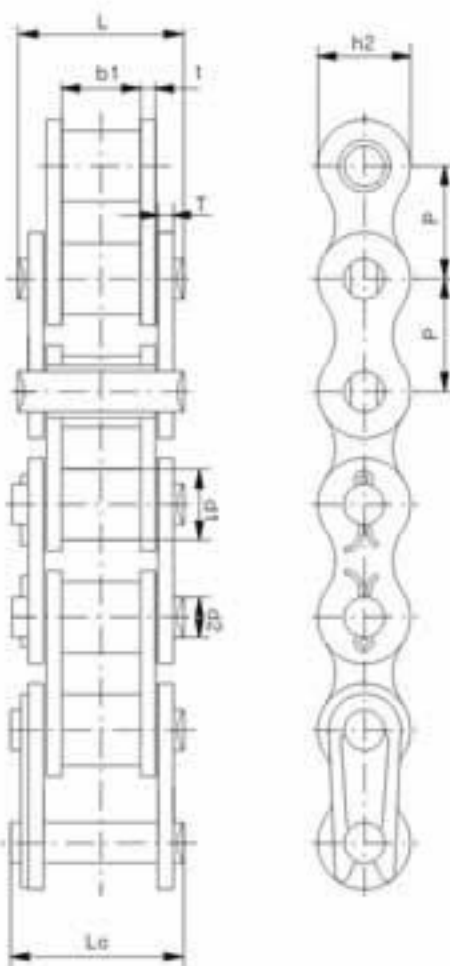

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimensions		破断载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米重量 Weight per meter
	P	d _r max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	Q	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
*25SS	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	2.5	2.8	0.15
*35SS	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	5.5	6.6	0.33
40SS	12.700	7.95	7.85	3.96	16.60	17.80	12.00	1.50	9.6	10.8	0.63
41SS	12.700	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.0	7.0	0.46
50SS	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	15.2	17.2	1.03
60SS	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	21.7	26.4	1.51
80SS	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	38.9	46.6	2.62
100SS	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	60.0	70.2	3.94
120SS	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	88.9	104.8	5.72
140SS	44.450	25.40	25.22	12.70	54.40	59.00	41.00	5.60	94.0	108.6	7.70
04BSS	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	2.0	2.4	0.11
05BSS	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	3.5	4.1	0.20
#06BSS	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	6.2	6.8	0.41
08BSS	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	12.0	14.3	0.70
10BSS	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	14.5	17.2	0.94
12BSS	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	18.5	20.9	1.16
16BSS	25.400	15.88	17.02	8.28	38.10	37.40	21.00	4.15/3.1	40.0	47.6	2.73
20BSS	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	59.0	69.6	3.73
24BSS	38.100	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	112.0	126.6	7.20
32BSS	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	150.0	179.6	10.22

*Bushing chain: d₁ in the table indicate the external diameter of the bushing.


*套筒链: 表中滚子直径d₁为套筒直径

#Straight side plates #直链板

Side Bow chains 侧弯链


侧弯链根据需要可带AI, KI等附件。适用于罐装、包装等曲线输送设备。

Side Bow Chain, with AI, KI attachments according to requirements is suitable for curvilinear conveyor equipments of the bottling and package.

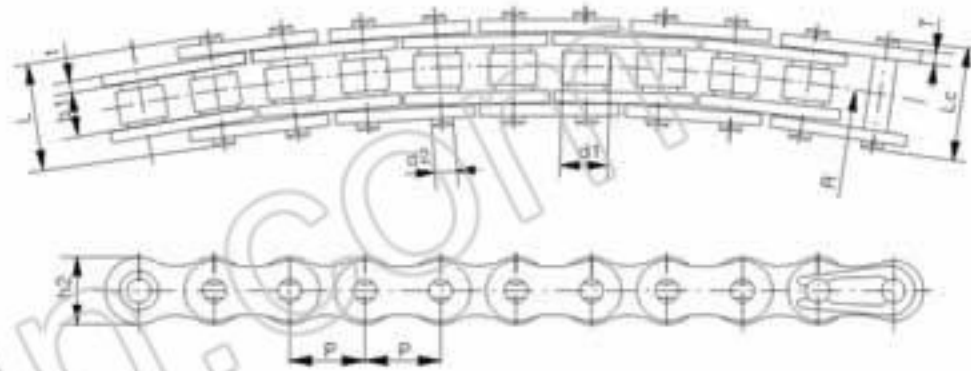


链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	内链板高度 Inner plate depth	销轴直径 Pin diameter	销轴长度 Pin length		链板厚度 Plate thickness	侧弯半径 Sideflex radius	极限拉伸载荷 Ultimate tensile strength	每米长重 weight per meter
	P	d1 max	b1 min	h2 max	d2 max	L max	Lc max	T/t	R max	Q min	q
	mm	mm	mm	mm	mm	mm	mm		mm	KN	Kg/m
35SB	9.525	5.08	4.68	8.2	3.28	12.6	13.7	1.3	215	5.5	0.32
40SB	12.700	7.95	7.85	11.4	3.45	17.2	19.6	1.5	315	13.8	0.57
08BSB	12.700	8.51	7.75	11.8	3.94	17.4	19.0	1.6	400	14.0	0.71
50SB	15.875	10.16	9.40	14.0	4.36	21.8	23.8	2.03	406	20.6	0.98
10BSB	15.875	10.16	9.65	14.6	4.37	19.7	21.2	1.7	406	15.0	0.93
60SB	19.050	11.91	12.57	18.0	5.08	26.7	28.6	2.42	508	22.4	1.47
12BSB	19.050	12.07	11.68	16.0	5.72	23.5	25.2	1.85	650	20.5	1.17
80SB	25.400	15.88	15.75	23.5	7.19	34.1	36.9	3.25	711	40.9	2.40

Side Bow chains for pushing window 推窗用侧弯链

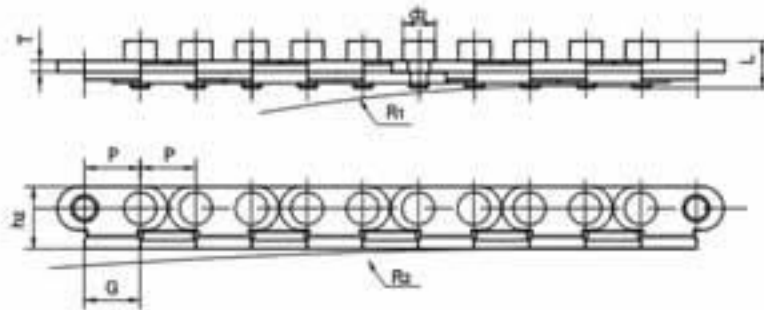


链号 Chain No.	节距 Pitch	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension			侧弯半径 Side bow radius		每米长重 Weight per meter
	P	d2 max	L	h2 max	G max	T max	R1	R2	q
	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
P12.75SB	12.75	7.4	10.65	14.25	12.8	2.5	500-800	1000	0.69

Anti-Side Bow chains for pushing window 推窗用防弯链

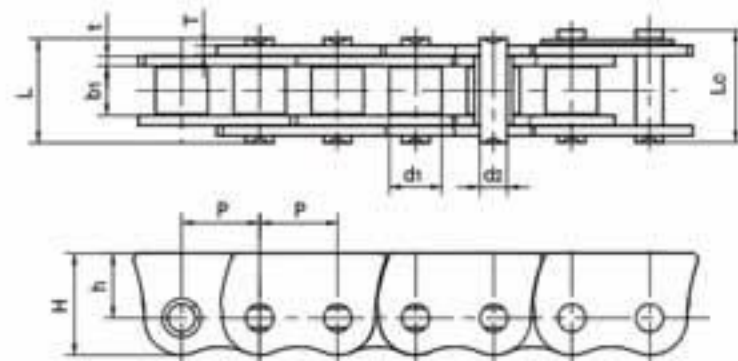


链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension			极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	H max	h	t/T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	kg/m
08AF6	12.7	7.95	7.85	3.96	16.6	17.8	17.0	11.0	1.5	13.8	0.91
415BF4	12.7	7.75	4.88	4.09	16.4	17.8	17.0	11.0	1.3/3.1	12.0	1.07
08BSSF20	12.7	8.51	7.75	4.45	16.7	18.2	16.5	10.5	1.6	12.0	1.06

Self-lubrication roller chains 自润滑滚子链

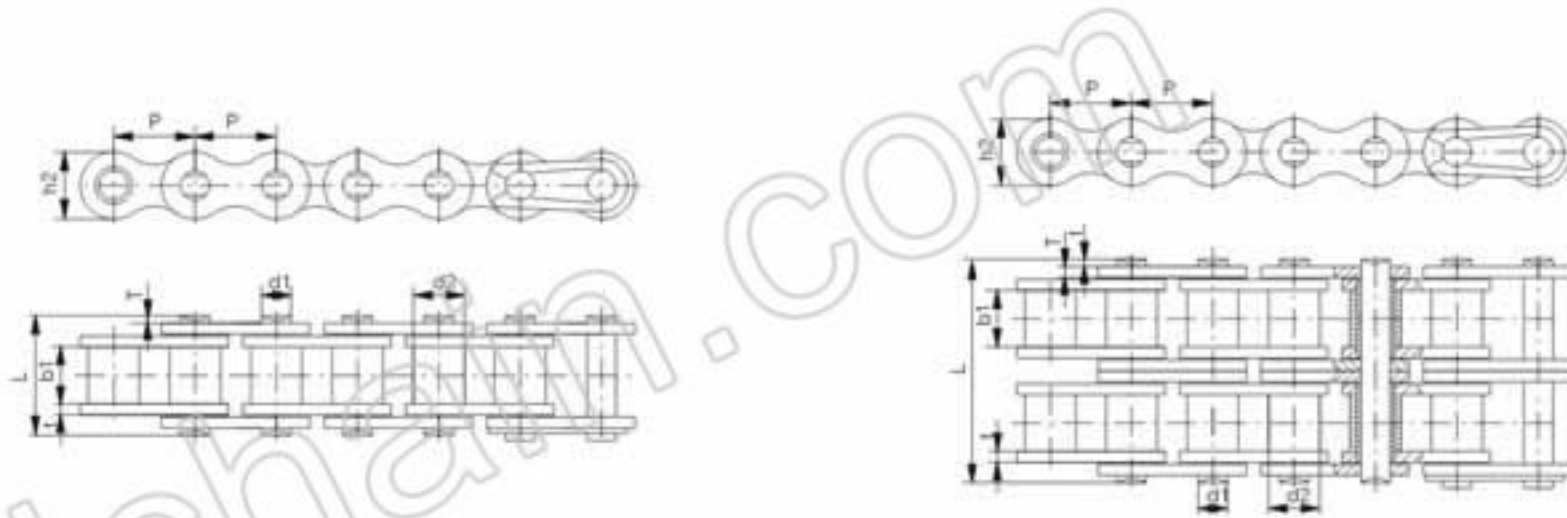

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	外节内宽 Width between outer plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimensions		极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	b2 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
60SLR	19.05	11.91	12.57	19.35	5.94	27.5	29.3	18.0	3.25/2.42	34.2	1.65
08BSLR	12.70	8.51	7.75	13.03	4.45	18.3	19.8	11.8	1.6	18.0	0.73
08BSLRF1	12.70	8.51	7.75	11.75	4.45	17.3	18.7	11.8	1.6	18.0	0.72
10BSLRF1	15.875	10.16	9.65	13.75	5.08	19.9	21.6	14.7	1.7	22.4	0.97
12BSLR	19.05	12.07	11.68	15.75	5.72	22.5	24.2	16.0	1.85	29.0	1.20
12BSLRF1	19.05	12.07	11.68	16.13	5.72	22.9	24.7	16.0	1.85	29.0	1.19
16BSLR	25.40	15.88	17.02	27.50	8.28	38.1	40.6	21.0	4.15/3.1	60.0	2.72
16BSLRF1	25.40	15.88	17.02	26.15	8.28	36.7	39.7	21.0	4.15/3.1	60.0	2.72
60SLR-2	19.05	11.91	12.57	42.13	5.94	50.3	52.1	18.0	3.25/2.42	68.4	3.21
12BSLR-2	19.05	12.07	11.68	35.21	5.72	42.0	43.6	16.0	1.85	58.0	2.42
16BSLR-2	25.40	15.88	17.02	57.46	8.28	68.0	71.0	21.0	4.15/3.1	106.0	5.68

Self-tooth-forming chains(PI.V.chains) PIV无级变速链

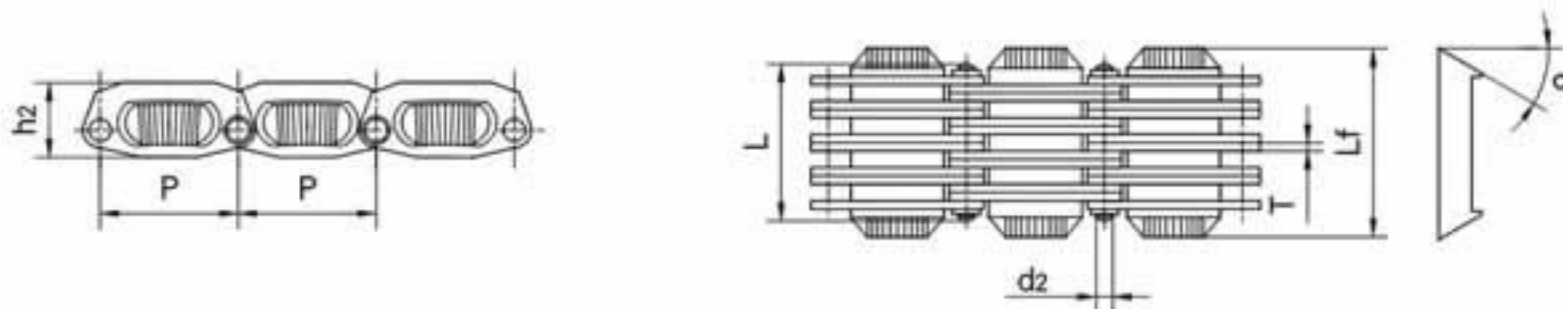


链号 Chain No.	节距 Pitch	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	摩擦片长度 Width over friction plate	摩擦片斜角 Angle of friction plate	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d2 max	L max	h2 max	T max	Lr	α	Q min	Qo	q
	mm	mm	mm	mm	mm	mm		kN/LB	kN	kg/m
A0	18.75	3.00	19.5	9.5	1.0	24.0	15°	9.0/2045	9.9	1.00
A1(A2)	25.0	3.00	30.1	13.5	1.5	37.8	15°	21.0/4772	23.3	2.23
A3	28.6	3.00	35.3	16.0	1.5	44.2	15°	38.5/8750	42.7	3.04
A4	36.0	4.00	48.5	20.5	1.5	58.5	15°	61.5/13977	68.2	5.54
A5	36.0	4.00	60.5	20.5	1.5	70.0	15°	71.0/16136	78.8	6.70



■ Silent chains 齿形链

Flank contact silent chains 外接触式齿形链



Middle guide 内导式

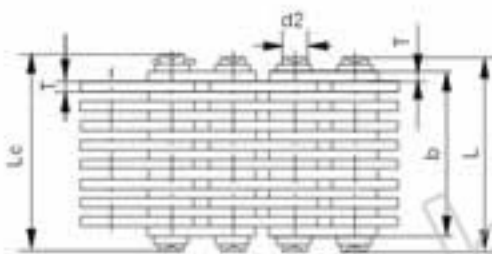



Side guide 外导式

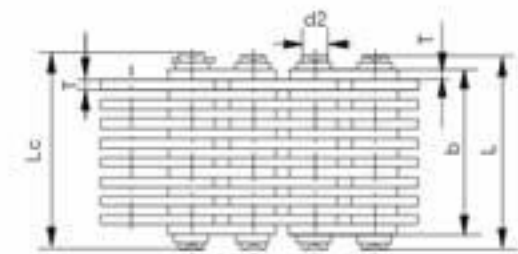

Middle guide 内导式

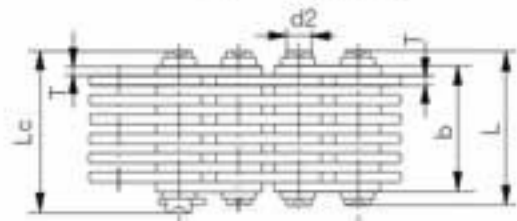

Side guide 外导式

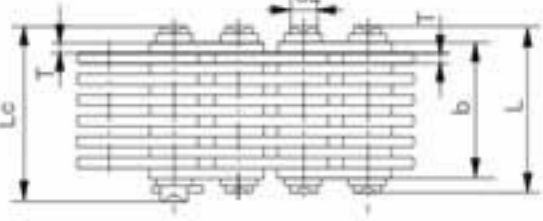


GB 链号 GB Chain No	节距 Pitch	链宽 Chain width	销轴直径 Pin diameter	销轴长度 Pin length		孔间到齿尖距离 Distance from hole centre to tooth	链板高度 Plate depth	链板厚度 Plate thickness	导向形式 Guide form	片数 Number of plates	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米重量 Weight per meter
	P	b min	d2 max	L max	Lc max	h1	h2 max	T max		n	Q min	Qa	q
	mm	mm	mm	mm	mm	mm	mm	mm			KN	KN	Kg/m
CL06	9.525	13.5	3.95	18.5	20.0	5.3	10.0	1.5	外(Outside)	9	10.0	11.2	0.60
				21.5	23.0				外(Outside)	11	12.5	14.0	0.73
				24.5	26.0				外(Outside)	13	15.0	16.8	0.85
				27.5	29.0				外(Outside)	15	17.5	19.6	1.00
				33.5	35.0				内(Inside)	19	22.5	25.2	1.26
CL08	12.700	19.5	5.08	24.5	26.0	7.0	13.4	1.5	外(Outside)	13	23.4	26.2	1.15
				27.5	29.0				外(Outside)	15	27.4	30.6	1.33
				30.5	32.0				外(Outside)	17	31.3	35.0	1.50
				33.5	35.0				内(Inside)	19	35.2	39.4	1.88
				39.5	41.0				内(Inside)	23	43.0	48.1	2.04
				45.5	47.0				内(Inside)	27	50.8	56.8	2.39
				51.5	53.0				内(Inside)	31	58.6	65.5	2.74
				57.5	59.0				内(Inside)	35	66.4	74.3	3.10
CL10	15.875	30.0	5.92	37.0	38.2	8.7	16.7	2.0	内(Inside)	15	45.6	50.6	2.21
				45.0	46.2				内(Inside)	19	58.6	65.0	2.80
				53.0	54.2				内(Inside)	23	71.7	79.5	3.39
				61.0	62.4				内(Inside)	27	84.7	94.0	3.99
				69.0	70.4				内(Inside)	31	97.7	108.4	4.58
CL12	19.050	38.0	6.90	45.0	46.5	10.5	20.0	2.0	内(Inside)	19	70.0	77.6	3.37
				53.0	54.5				内(Inside)	23	86.0	95.4	4.08
				61.0	62.8				内(Inside)	27	102.0	113.2	4.78
				69.0	70.8				内(Inside)	31	117.0	129.8	5.50
				77.0	78.8				内(Inside)	35	133.0	147.6	6.20
CL16	25.400	45.0	8.90	52.0	53.5	14.0	26.7	3.0	内(Inside)	15	111.0	123.2	5.31
				58.0	59.5				内(Inside)	17	125.0	138.7	6.02
				64.0	65.5				内(Inside)	19	141.0	156.5	6.37
				76.2	77.7				内(Inside)	23	172.0	190.9	8.15
				88.2	89.7				内(Inside)	27	203.0	225.3	9.57
				100.2	101.7				内(Inside)	31	235.0	260.8	10.98
CL20	31.750	57.0	10.84	66.6	69.6	17.5	33.4	3.0	内(Inside)	19	165.0	183.1	8.42
				78.6	81.6				内(Inside)	23	201.0	223.1	10.19
				90.6	93.6				内(Inside)	27	237.0	263.2	11.96
				102.6	105.6				内(Inside)	31	273.0	303.0	13.73
				114.6	117.6				内(Inside)	35	310.0	341.0	15.50
				126.6	129.6				内(Inside)	39	346.0	380.6	17.27

Croch contact silent chains 内接触式齿形链


ANSI 链号 ANSI Chain No	节距 Pitch	链宽 Chain width	销轴直径 Pin diameter	销轴长度 Pin length		孔间到齿尖距离 Distance from hole centre to tooth	链板高度 Plate depth	链板厚度 Plate thickness	导向形式 Guide form	片数 Number of plates	极限拉伸载荷 Ultimate strength	平均拉伸载荷 Average strength	每米重量 Weight per meter	
	P	b min	d2 max	L max	Lc max	h1	h2 max	T max		n	Q min	Qa	q	
	mm	mm	mm	mm	mm	mm	mm	mm			KN	KN	Kg/m	
C4-120	12.7	19.5	5.08	24.5	26.0	6.62	12.1	1.5	内(Inside)	13	20.0	22.2	1.20	
C4-123				27.5	29.0				内(Inside)	15	23.0	25.5	1.37	
C4-129				33.5	35.0				内(Inside)	19	28.5	31.6	1.72	
C4-132				36.5	38.0				内(Inside)	21	31.5	34.9	1.89	
C4-138				42.5	44.0				内(Inside)	25	38.0	42.1	2.22	
C4-150				49.5	56.0				内(Inside)	33	50.0	55.5	2.90	
C4-320				19.5	24.5				26.0	外(Outside)	13	20.0	22.2	1.21
C4-323				22.5	27.5				29.0	外(Outside)	15	23.0	25.5	1.38
C4-329				28.5	33.5				35.0	外(Outside)	19	28.5	31.6	1.73
C4-332				31.5	36.5				38.0	外(Outside)	21	31.5	34.9	1.90
C4-338	37.5	42.5	44.0	外(Outside)	25	38.0	42.1	2.23						

■ Heavy-duty cranked-link transmission chains 重载弯板传动链

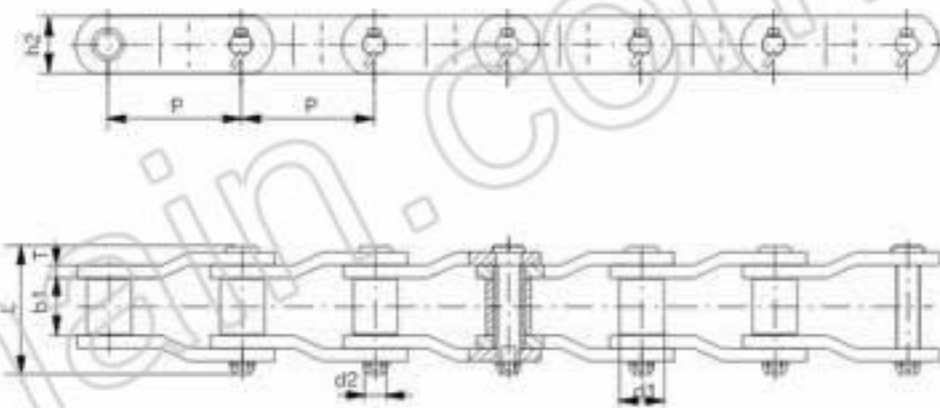


链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimensions		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d ₂ max	b ₁ min	d ₂ max	L max	h ₂ max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
2010	63.50	31.75	38.10	15.90	90.7	47.8	7.9	250.0	270.00	14.00
2510	78.10	31.75	38.90	16.00	94.8	40.0	8.0	271.0	292.60	10.72
2512	77.90	41.28	39.60	19.05	100.0	57.0	9.7	340.0	367.20	18.40
2512F2	77.90	41.28	38.50	19.05	103.4	60.0	10.0	400.0	420.00	20.28
2814	88.90	44.45	38.60	22.23	117.6	58.0	12.7	471.0	507.60	25.70
3214	103.20	44.45	48.00	22.00	123.5	55.0	13.0	476.0	514.00	23.60
3315	103.45	45.24	49.30	23.85	130.0	63.5	14.2	550.0	594.00	27.71
3618	114.30	57.15	52.30	27.97	138.0	79.2	14.2	760.0	820.80	41.20
4020	127.00	63.50	69.90	31.78	165.7	88.9	15.7	987.0	1069.20	48.60
2184	152.40	76.20	35.00	22.20	96.0	51.0	9.5	330.0	378.00	18.17
MXS882	66.27	22.23	28.58	11.10	68.5	28.5	6.4	115.6	124.80	5.30
MXS3075	78.10	31.75	38.10	16.46	93.5	44.5	9.7	334.0	360.70	13.45
MXS1242	103.20	44.45	49.20	22.23	124.5	57.0	12.8	623.0	672.80	24.63
SS588	66.27	22.23	28.60	11.11	63.7	28.6	6.3	130.0	144.00	5.46
SS588H	77.90	41.30	39.70	19.05	97.6	57.0	9.5	340.0	367.20	19.80
SS40H(P)	78.11	31.75	38.10	15.88	97.0	41.5	9.5	250.0	280.00	12.60
SS124	103.20	44.45	49.20	22.23	127.2	57.0	12.7	580.0	590.00	22.57

■ Steelchains for Sewage Disposal 钢制污水处理链条

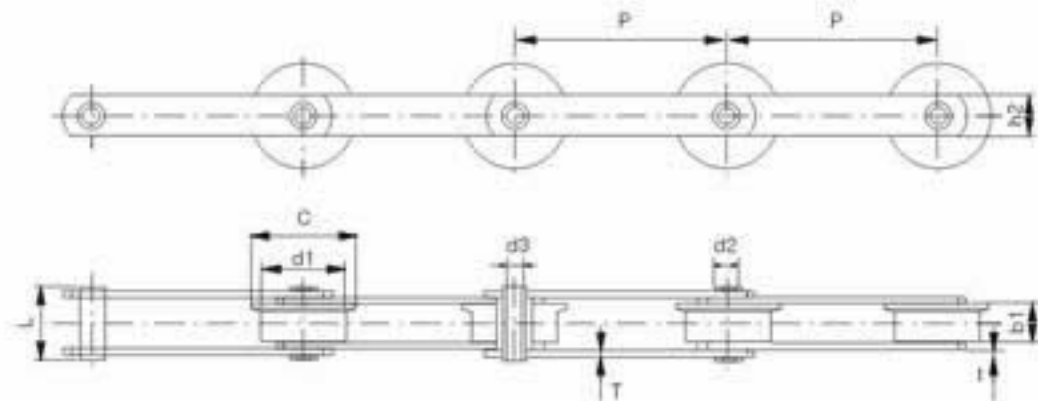


链号 Chain No.	节距 Pitch	内节内宽 Width between inner plates	滚子直径 Roller diameter	销轴直径 Pin diameter		销轴长度 Pin length	销轴高度 Pin depth	链板尺寸 Plate dimensions		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter	
	P	b ₁ min	d ₂ max	d ₂ max	d ₃ max	L max	h ₂ max	T max	t max	Q min	Q ₀	q	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m	
W152	152.4	25.40	68.7	85.7	27.1	20.0	58.8	50.0	5.0	7.0	110.0	122.1	10.78

Oil field chains 石油链

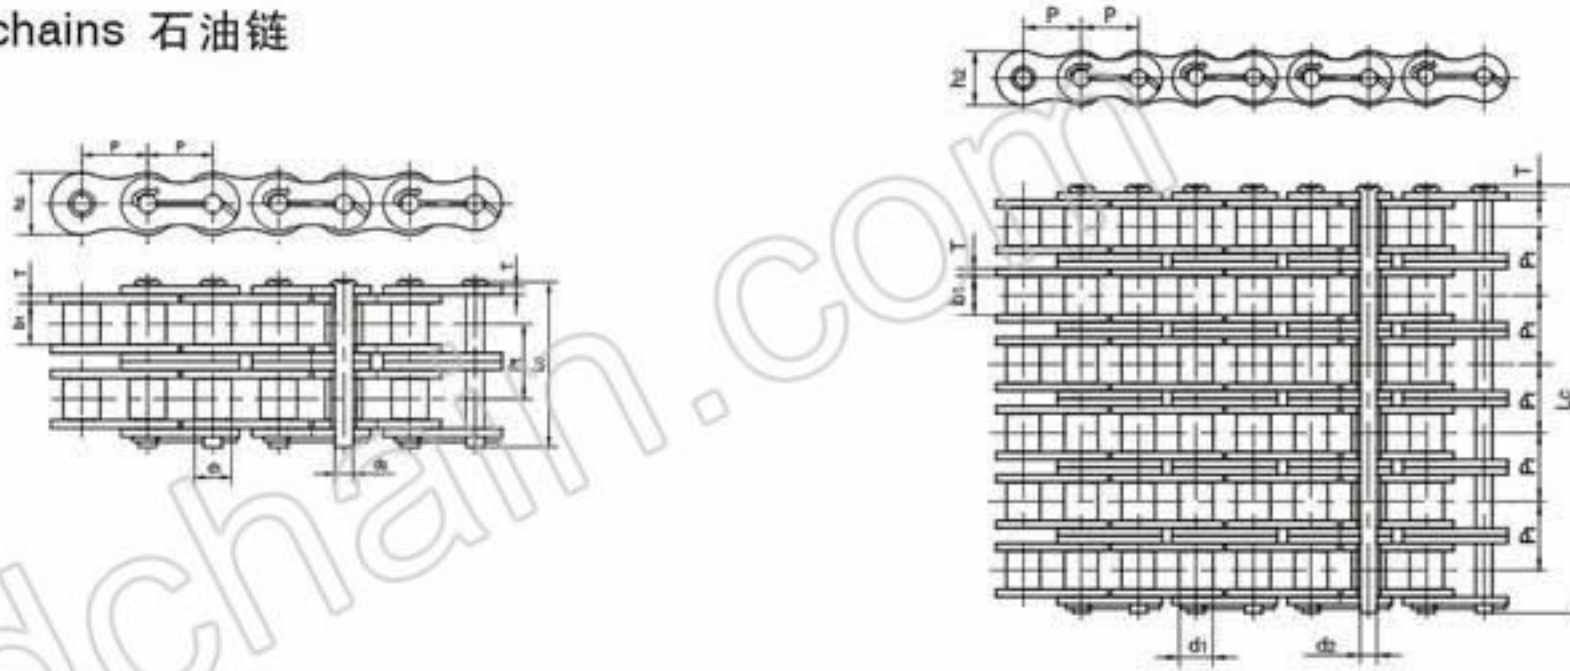


ANSI 链号 ANSI Chain No.	链号 Chain No.	节距 Pitch		滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thick- ness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
		P										
		mm	inch	d1 max	b1 min	d2 max	Lo max	h2 max	T max	Pt	Q min	q
80	16S-1	25.400	1	15.88	15.75	7.92	37.55	24.1	3.25		55.6/12500	2.60
100	20S-1	31.750	1 1/4	19.05	18.90	9.53	44.3	30.0	4.00		86.87/19500	3.91
120	24S-1	38.100	1 1/2	22.23	25.22	11.10	54.4	36.2	4.80		125.1/28100	5.62
140	28S-1	44.450	1 3/4	25.40	25.22	12.70	59.0	42.2	5.60		170.27/38300	7.50
160	32S-1	50.800	2	28.58	31.55	14.27	69.6	48.2	6.40		222.4/50000	10.10
180	36S-1	57.150	2 1/4	35.71	35.48	17.46	78.6	54.3	7.20		281.47/63300	13.45
200	40S-1	63.500	2 1/2	39.68	37.85	19.85	87.2	60.3	8.00		347.5/78100	16.15
80-2	16S-2	25.400	1	15.88	15.75	7.92	66.8	24.1	3.25	29.29	111.2/25000	5.15
100-2	20S-2	31.750	1 1/4	19.05	18.90	9.53	80.5	30.1	4.00	35.76	173.74/39000	7.80
120-2	24S-2	38.100	1 1/2	22.23	25.22	11.10	99.7	36.2	4.80	45.44	250.2/56200	11.70
140-2	28S-2	44.450	1 3/4	25.40	25.22	12.70	107.8	42.2	5.60	48.87	340.54/76600	15.14
160-2	32S-2	50.800	2	28.58	31.55	14.27	127.5	48.2	6.40	58.55	444.8/100000	20.14
180-2	36S-2	57.150	2 1/4	35.71	35.48	17.46	144.4	54.3	7.20	65.84	562.94/126600	29.22
200-2	40S-2	63.500	2 1/2	39.68	37.85	19.85	158.8	60.3	8.00	71.55	695.0/156200	32.24
80-3	16S-3	25.400	1	15.88	15.75	7.92	96.1	24.1	3.25	29.29	166.8/37500	7.89
100-3	20S-3	31.750	1 1/4	19.05	18.90	9.53	116.3	30.1	4.00	35.76	260.61/58500	11.77
120-3	24S-3	38.100	1 1/2	22.23	25.22	11.10	145.2	36.2	4.80	45.44	375.3/84300	17.53
140-3	28S-3	44.450	1 3/4	25.40	25.22	12.70	156.8	42.2	5.60	48.87	510.81/114900	22.20
160-3	32S-3	50.800	2	28.58	31.55	14.27	186.6	48.2	6.40	58.55	667.2/15000	30.02
180-3	36S-3	57.150	2 1/4	35.71	35.48	17.46	210.2	54.3	7.20	65.84	844.41/189900	38.22
200-3	40S-3	63.500	2 1/2	39.68	37.85	19.85	230.4	60.3	8.00	71.55	1042.5/234300	49.03
200H-3	40HS-3	63.500	2 1/2	39.68	37.85	19.85	249.6	60.3	9.50	78.31	1042.5/234300	56.74
80-4	16S-4	25.400	1	15.88	15.75	7.92	122.9	24.1	3.25	29.29	222.4/50000	10.24
100-4	20S-4	31.750	1 1/4	19.05	18.90	9.53	151.5	30.1	4.00	35.76	347.48/78000	15.39
120-4	24S-4	38.100	1 1/2	22.23	25.22	11.10	190.6	36.2	4.80	45.44	500.4/112400	22.19
140-4	28S-4	44.450	1 3/4	25.40	25.22	12.70	205.7	42.2	5.60	48.87	681.08/153200	29.63
160-4	32S-4	50.800	2	28.58	31.55	14.27	245.2	48.2	6.40	58.55	889.6/200000	39.94
200-4	40S-4	63.500	2 1/2	39.68	37.85	19.85	302.0	60.3	8.00	71.55	1390.0/312400	63.80
80-5	16S-5	25.400	1	15.88	15.75	7.92	152.2	24.1	3.25	29.29	278.0/62500	12.79
100-5	20S-5	31.750	1 1/4	19.05	18.90	9.53	187.8	30.1	4.00	35.76	434.35/97500	19.22
120-5	24S-5	38.100	1 1/2	22.23	25.22	11.10	236.1	36.2	4.80	45.44	625.5/140500	27.71
140-5	28S-5	44.450	1 3/4	25.40	25.22	12.70	254.6	42.2	5.60	48.87	851.35/193486	39.20
160-5	32S-5	50.800	2	28.58	31.75	14.27	303.3	48.2	6.40	58.55	1112.0/252724	52.40
80-6	16S-6	25.400	1	15.88	15.75	7.92	181.5	24.1	3.25	29.29	333.6/75000	15.34
100-6	20S-6	31.750	1 1/4	19.05	18.90	9.53	223.6	30.1	4.00	35.76	521.22/117000	23.05
120-6	24S-6	38.100	1 1/2	22.23	25.22	11.10	281.6	36.2	4.80	45.44	750.6/168600	33.24
140-6	28S-6	44.450	1 3/4	25.40	25.22	12.70	303.4	42.2	5.60	48.87	1021.62/229800	44.38
160-6	32S-6	50.800	2	28.58	31.55	14.27	362.3	48.2	6.40	58.55	1334.4/300000	59.83
200-6	40S-6	63.500	2 1/2	39.68	37.85	19.85	445.0	60.3	8.00	71.55	2085.0/468600	95.23
80-8	16S-8	25.400	1	15.88	15.75	7.92	240.1	24.1	3.25	29.29	444.8/100000	20.44
100-8	20S-8	31.750	1 1/4	19.05	18.90	9.53	295.1	30.1	4.00	35.76	694.96/156000	30.71
120-8	24S-8	38.100	1 1/2	22.23	25.22	11.10	372.4	36.2	4.80	45.44	1000.8/224800	44.28
140-8	28S-8	44.450	1 3/4	25.40	25.22	12.70	401.1	42.2	5.60	48.87	1362.16/309578	62.21

■ Coupling chains 联轴器链

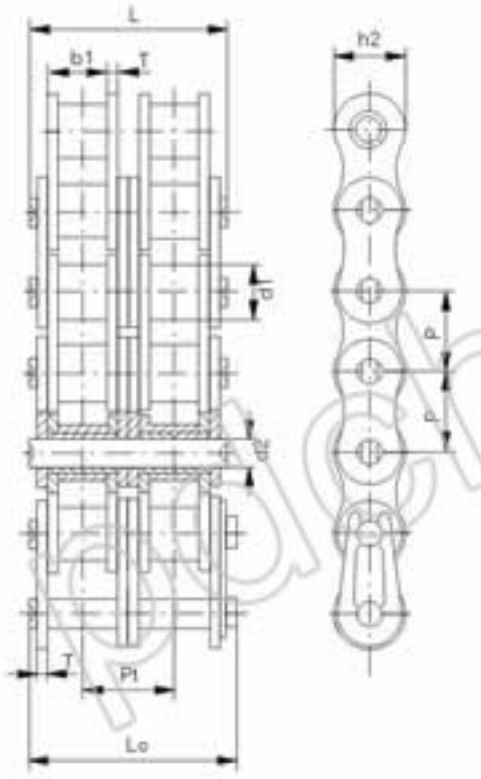


链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Pt	Q mix	Qo	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
4012	12.700	7.95	7.85	3.96	31.0	32.2	12.00	1.50	14.38	28.2	35.9	0.16
4014	12.700	7.95	7.85	3.96	31.0	32.2	12.00	1.50	14.38	28.2	35.9	0.19
4016	12.700	7.95	7.85	3.96	31.0	32.2	12.00	1.50	14.38	28.2	35.9	0.21
5014	15.875	10.16	9.40	5.08	38.8	40.4	15.09	2.03	18.11	44.4	58.1	0.49
5016	15.875	10.16	9.40	5.08	38.8	40.4	15.09	2.03	18.11	44.4	58.1	0.56
5018	15.875	10.16	9.40	5.08	38.8	40.4	15.09	2.03	18.11	44.4	58.1	0.63
6018	19.050	11.91	12.57	5.94	48.8	50.5	18.00	2.42	22.78	63.6	82.1	1.00
6020	19.050	11.91	12.57	5.94	48.8	50.5	18.00	2.42	22.78	63.6	82.1	1.11
6022	19.050	11.91	12.57	5.94	48.8	50.5	18.00	2.42	22.78	63.6	82.1	1.22
8018	25.400	15.88	15.75	7.92	62.0	64.3	24.00	3.25	29.29	113.4	141.8	2.35
8020	25.400	15.88	15.75	7.92	62.0	64.3	24.00	3.25	29.29	113.4	141.8	2.62
8022	25.400	15.88	15.75	7.92	62.0	64.3	24.00	3.25	29.29	113.4	141.8	2.68
10022	31.750	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.0	219.4	4.95
12018	38.100	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.0	314.9	8.14

■ Other simplex roller chains 其它单排滚子链

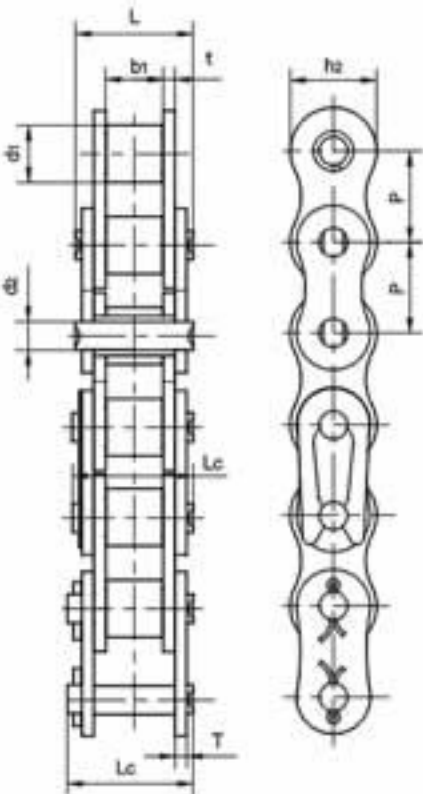


链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Qo	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
A06B-2	9.525	6.35	5.72	3.28	23.4	24.40	8.20	1.30	16.90/3841	18.7	0.75
415	12.70	7.77	4.76	3.60	11.0	12.40	9.70	1.00	6.86/1559	7.6	0.32
415H	12.70	7.77	4.76	3.96	13.1	14.50	12.00	1.50	14.40/3273	16.1	0.55
415B	12.70	7.75	4.88	4.09	12.9	14.40	10.30	1.30	12.00/2727	14.2	0.45
415BF1	12.70	7.75	4.88	4.09	11.5	13.00	10.30	1.00	9.00/2045	10.6	0.38
415BF3	12.70	7.75	4.80	4.09	11.6	13.65	10.30	1.20	9.80/2227	10.7	0.43
415BF5	12.70	7.75	5.10	4.09	14.4	16.00	9.90	1.8/1.6	16.00/3600	16.5	0.46
415BF7	12.70	7.75	4.88	3.58	13.8	15.00	10.30	1.30	6.00/1363	10.7	0.40
423	12.70	8.51	6.40	4.45	15.6	17.10	12.40	1.70	19.60/4455	21.9	0.71
478	12.70	7.80	4.80	4.00	11.6	13.65	10.46	1.25	9.80/2227	12.8	0.39
170GSX	12.70	7.75	6.45	3.96	14.8	16.40	11.50	1.6/1.4	17.15/3860	18.5	0.62
205	12.70	8.51	6.40	4.45	15.2	16.30	11.80	1.6/1.3	18.00/4049	19.0	0.85
08BF	12.70	8.51	5.55	4.45	14.6	16.10	11.80	1.60	17.80/4045	19.2	0.66
12BF14	19.05	12.07	30.56	5.72	42.0	43.60	16.00	1.85	29.00/6591	32.2	2.13
515	19.05	12.07	13.50	5.72	28.6	31.30	16.20	3.0	30.0/6748	33.0	1.83
14BF1	22.225	14.30	14.60	9.00	36.3	38.00	23.50	4.8/4.0	75.0/16871	82.5	3.59
16BF1	25.40	15.88	12.20	8.28	31.4	32.70	21.00	4.15/3.1	60.00/13636	71.4	2.51
16BF2	25.40	15.88	17.02	8.28	38.6	39.80	21.00	4.15	60.00/13636	71.4	3.08
16BF5	25.40	15.88	12.70	8.28	30.8	32.10	20.00	3.5/3.0	50.00/11364	57.5	2.37
850HSA	25.40	17.80	15.88	9.53	42.0		26.60	5.6/4.8	122.5 0/27840	135.9	4.85
32AF2	50.80	32.00	31.75	17.00	64.8	69.60	48.00	6.40	200.00/45454	222.5	11.61
32AT	50.80	28.58	15.88	14.27	36.2	40.80	47.80	3.25	111.2 0/25272	123.6	5.21

Double pitch transmission chains 双节距传动链

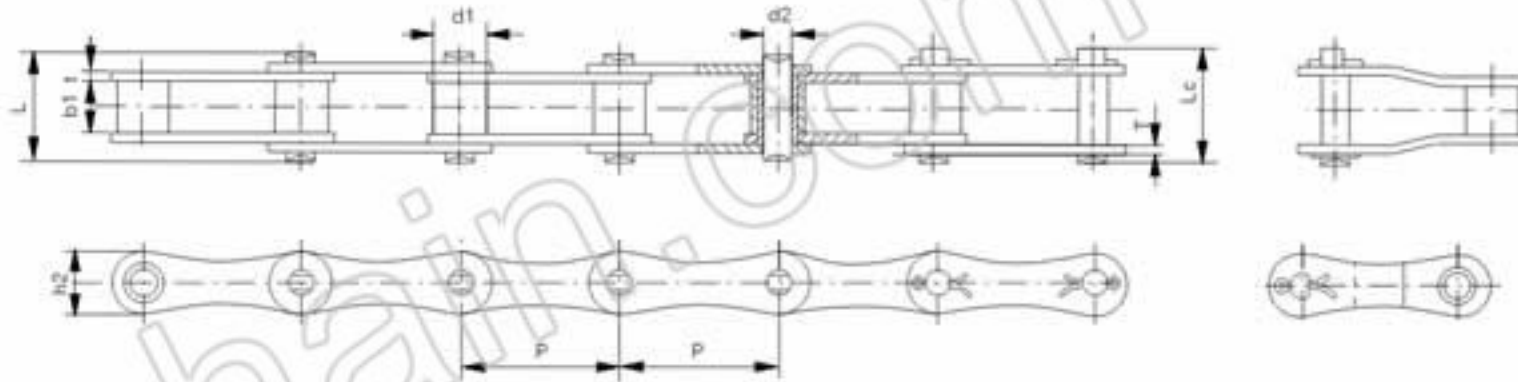


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米重量
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Qe	q
		mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
208A	2040	25.40	7.95	7.85	3.96	16.6	17.8	12.0	1.50	14.1	16.7	0.42
208B		25.40	8.51	7.75	4.45	16.7	18.2	11.8	1.60	18.0	19.4	0.45
210A	2050	31.75	10.16	9.40	5.08	20.7	22.2	15.0	2.03	22.2	28.1	0.73
210B		31.75	10.16	9.65	5.08	19.5	20.9	14.7	1.70	22.4	27.5	0.65
212A	2060	38.10	11.91	12.57	5.94	25.9	27.7	18.0	2.42	31.8	36.8	1.02
212B		38.10	12.07	11.68	5.72	22.5	25.2	16.0	1.85	29.0	32.2	0.76
216A	2080	50.80	15.88	15.75	7.92	32.7	36.5	24.0	3.25	56.7	65.7	1.70
216AH	2080H	50.80	15.88	15.75	7.92	36.2	39.4	24.0	4.00	56.7	70.0	2.17
216B		50.80	15.88	17.02	8.28	36.1	39.1	21.0	4.15/3.1	60.0	72.8	1.75
220A	2100	63.50	19.05	18.90	9.53	40.4	44.7	30.0	4.00	88.5	102.6	2.55
220B		63.50	19.05	19.56	10.19	41.3	45.0	26.4	4.5/3.5	95.0	106.7	2.62
224A	2120	76.20	22.23	25.22	11.10	50.3	54.3	35.7	4.80	127.0	147.3	4.06
224B		76.20	25.40	25.40	14.63	53.4	57.8	33.2	6.0/4.8	160.0	178.0	4.70
228B		86.90	27.94	30.99	15.90	65.1	69.5	36.7	7.5/6.0	200.0	222.0	6.23
232B		101.60	29.21	30.99	17.81	66.0	71.0	42.0	7.0/6.0	250.0	277.5	6.72

Double pitch conveyor chain attachments 双节距输送链附件

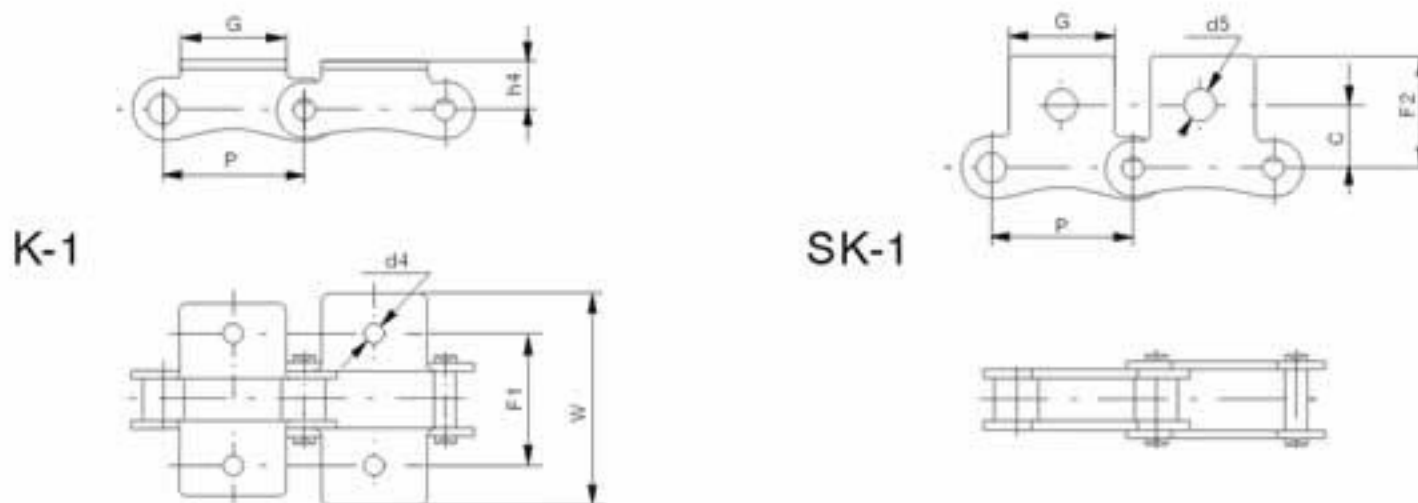

DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	P	G	F1	W	h4	d4	C	F2	ds
		mm	mm	mm	mm	mm	mm	mm	mm	mm
208A	2040	25.40	19.1	25.40	39.6	9.1	3.4	11.1	20.5	5.5
210A	2050	31.75	23.8	31.8	49.0	11.1	5.5	14.3	25.0	6.6
212A	2060	38.10	28.6	42.9	67.8	14.7	5.5	17.5	32.9	9.2
216A	2080	50.80	38.1	55.6	87.8	19.1	6.8	22.2	43.5	11.0
220A	2100	63.50	47.6	66.60	107.5	23.4	9.2	28.6	50.4	13.0
224A	2120	76.20	57.2	79.30	127.5	27.8	11.0	33.3	55.5	15.0

Motorcycle chains 摩托车链

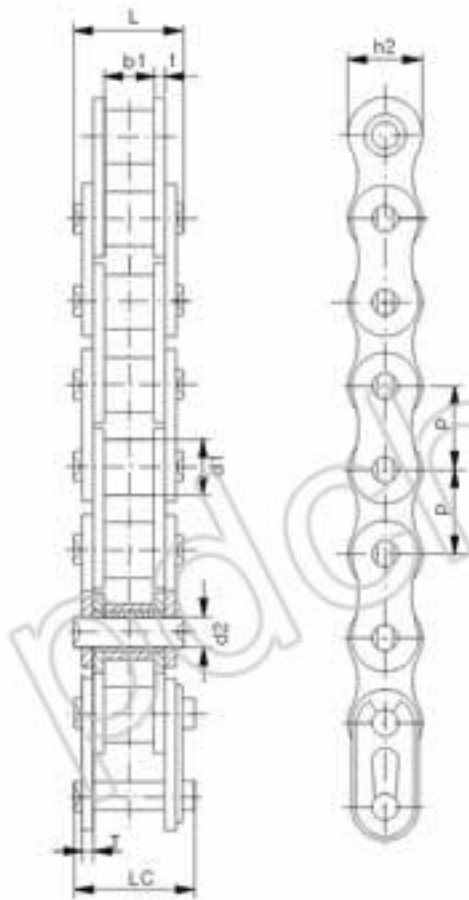


Motorcycle chains 摩托车链

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	p	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
*25H	8.350	3.30	3.18	2.31	8.88	9.40	6.00	1.00	4.80	5.5	0.17
*270H	8.500	5.00	4.75	3.28	13.15		8.45	1.8/1.4	9.80	11.0	0.33
*T3F	9.525	6.00	9.50	4.50	18.60		9.30	1.85/1.48	11.80	14.1	0.61
420	12.700	7.77	6.25	3.96	14.70	16.10	12.00	1.50	16.00	18.1	0.55
428	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	17.80	20.1	0.70
428H	12.700	8.51	7.85	4.45	18.08	19.18	11.80	2.03	20.60	23.4	0.79
428DS	12.700	8.51	7.75	4.45	18.08	19.18	12.00	1.85	18.62	21.0	0.76
520	15.875	10.16	6.25	5.08	17.50	19.00	15.09	2.03	26.50	29.7	0.89
530	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	26.50	29.7	1.06
630	19.050	11.91	12.70	5.94	25.90	27.70	18.00	2.42	31.8	41.5	1.50


*套筒链: 表中滚子直径d1为套筒直径

*Bushing chain: d1 in the table indicate the external diameter of the bushing.

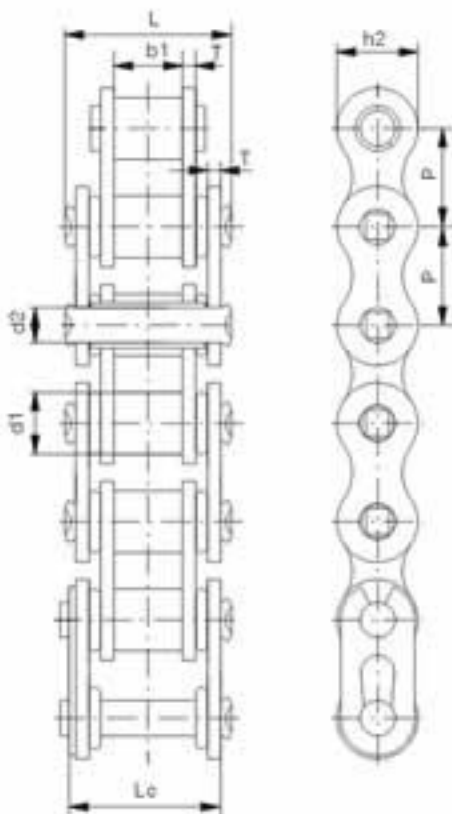

O-Ring motorcycle chains O型密封圈摩托车链

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板尺寸 Inner plate dimensions		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	p	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
428HVS	12.700	8.51	7.94	4.45	21.3	22.4	12.3	2.03	22.0	23.00	0.85
50LD	15.875	10.16	9.53	5.08	23.4	24.6	15.09	2.03	22.2	26.50	1.12
520V6	15.875	10.16	6.25	5.08	19.6	21.3	15.09	2.03	22.2	26.50	0.96
520HOR	15.875	10.16	6.25	5.24	21.52	22.92	15.09	2.42	26.5	29.60	1.26
530HOR	15.875	10.16	9.53	5.24	24.8	26.2	15.09	2.42	29.0	30.00	1.39

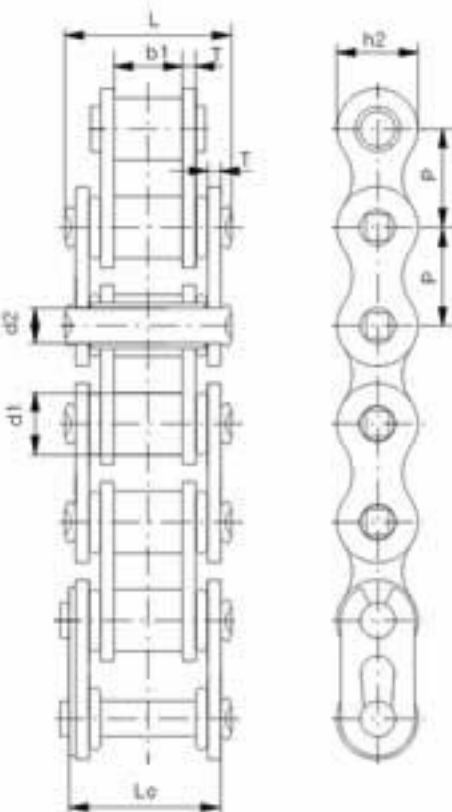


X-Ring motorcycle chains X型密封圈摩托车链

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板尺寸 Inner plate dimensions		极限拉伸载荷 Ultimate tensile strength
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	KN
428HV-X	12.700	8.51	7.94	4.45	21.6	23.0	12.40	2.03	23.0
520V-X	15.875	10.16	6.35	5.08	20.6	22.0	15.00	2.42	30.0
520HV-X	15.875	10.16	6.35	5.24	22.0	23.5	15.00	2.42	34.0
525HV-X	15.875	10.16	7.94	5.24	23.8	25.5	15.09	2.03	34.0
530V-X	15.875	10.16	9.50	5.08	23.8	25.2	15.09	2.03	30.0
530HV-X	15.875	10.16	9.60	5.24	25.4	27.0	15.00	2.42	34.0
630V-X	19.050	11.91	12.63	5.94	26.1	28.8	18.00	2.42	40.0
630HV-X	19.050	11.91	12.63	5.94	31.3	33.1	18.00	3.25	42.0

■ Engine mechanism chains (Timing chains) 发动机链(正时链)

Our engine mechanism chains are composed of starter chains primary drive chains, automotive timing chains and oil pump chains etc.

发动机链条包括起动链，基础驱动链，汽车时规链，油泵链等




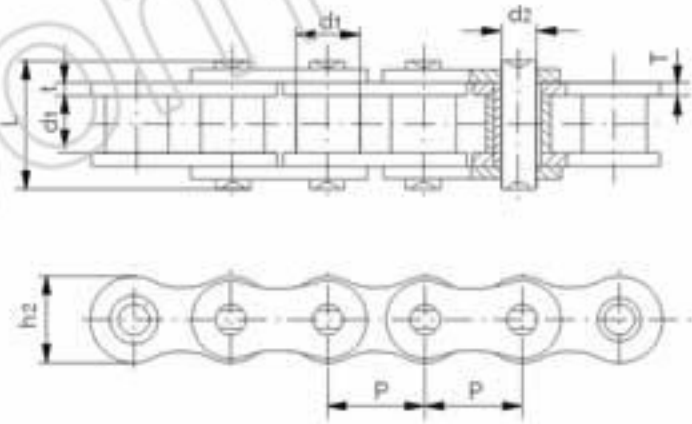


链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	p	d _r max	b ₁ min	d ₂ max	L _c max	h ₂ max	t/T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
*25H	6.350	3.30	3.18	2.31	8.88	6.00	1.00	4.8	5.5	0.17
*25-1	6.350	3.30	3.18	2.31	7.90	6.00	0.80	3.5	4.6	0.15
*25-2	6.350	3.30	3.18	2.31	14.50	6.00	0.80	7.0	8.6	0.28
*270H	8.500	5.00	4.75	3.28	13.15	8.45	1.8/1.4	9.8	11.0	0.33
*35	9.525	5.08	4.77	3.58	12.30	8.70	1.30	7.9	10.8	0.33
#06AT	9.525	6.35	3.94	3.28	10.50	8.20	1.3/1.04	8.9	10.0	0.34
*#T8F	8.000	4.71	4.61	3.05	11.48	7.60	1.3/1.04	7.0	9.8	0.35
#06BT-1	9.525	6.35	5.72	3.28	12.43	8.20	1.3/1.04	9.0	10.0	0.38
#06BT-2	9.525	6.35	5.72	3.28	22.70	8.20	1.3/1.04	16.9	17.9	0.73

*Bushing chain: d₁ in the table indicate the external diameter of the bushing.


Straight side plates
#直链板

*套筒链：表中滚子直径d₁为套筒直径

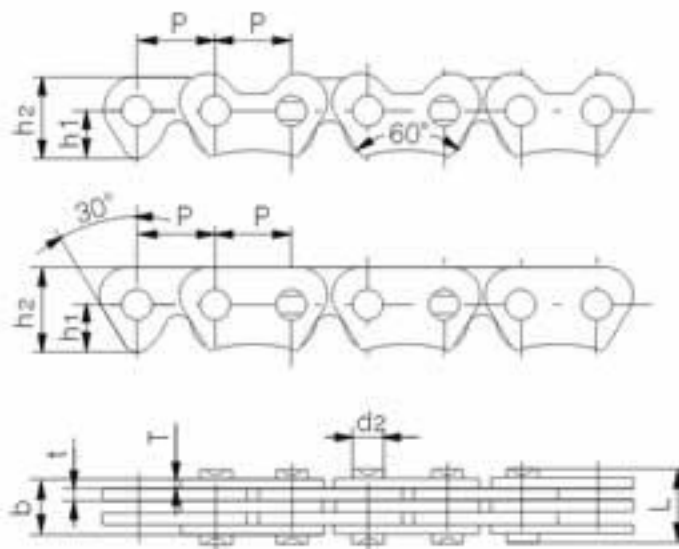


链号 Chain No.	节距 Pitch	链宽 Chain width	销轴直径 Pin diameter	销轴长度 Pin length	孔间到 齿尖距离 Distance from hole centre to tooth	链板高度 Plate depth	链板厚度 Plate thickness	导向形式 Guide form	片数 Number of plates	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	b _{min}	d ₂ max	L _{max}	H ₁	h ₂	t/T max		n	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm		mm	KN	KN	Kg/m
CL04	6.35	4.35	2.50	6.1	3.9	6.72	1.04/0.75	Outside	5(2x3)	5.19	5.4	0.22
CL04	6.35	6.35	2.50	8.2	3.9	6.72	1.04/0.75	Outside	7(3x4)	8.82	9.2	0.28
CL04	6.35	9.40	2.50	10.9	3.9	6.72	1.04	Outside	9(4x5)	11.76	12.3	0.35

■ Leaf chains 板式链

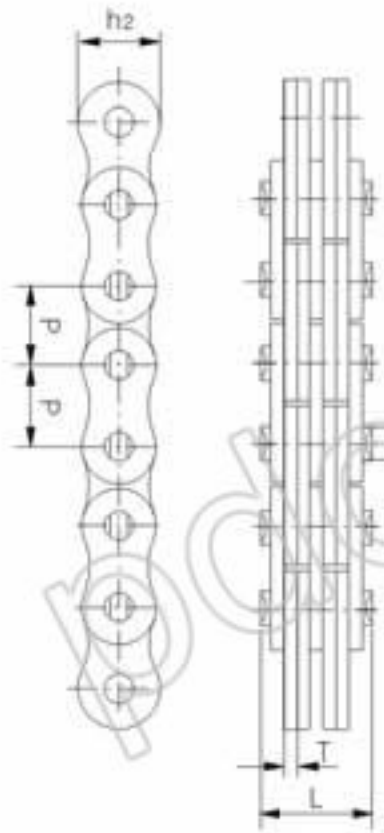


Plates lacing 链板组合

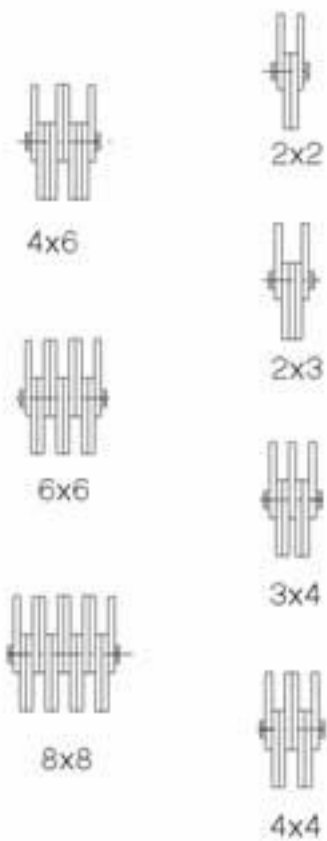


ISO 链号 ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	链板组合 Chain lacing	链板高度 Plate depth	链板厚度 Plate thickness	销轴直径 Pin diameter	销轴长度 Pin length	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		p		h ₂ max	T max	d ₂ max	L max	Q min	Q ₀	q
		mm		mm	mm	mm	mm	KN	KN	Kg/m
LH0822	BL422	12700	2X2	1207	2.03	5.08	10.86	22.2	27.6	0.64
LH0823	BL423		2X3				12.91	22.2	27.6	0.80
LH0834	BL434		3X4				17.05	33.4	41.4	1.12
LH0844	BL444		4X4				19.11	44.5	56.0	1.28
LH0846	BL446		4X6				23.25	44.5	56.0	1.60
LH0866	BL466		6X6				27.39	66.7	81.7	1.92
LH0888	BL488		8X8				35.65	89.0	109.4	2.56
LH1022	BL522	15875	2X2	1509	2.42	5.94	12.82	33.4	41	0.88
LH1023	BL523		2X3				15.27	33.4	43.1	1.10
LH1034	BL534		3X4				20.18	48.9	65.6	1.50
LH1044	BL544		4X4				22.62	66.7	84.5	1.80
LH1046	BL546		4X6				27.54	66.7	84.5	2.20
LH1066	BL566		6X6				32.45	100.1	125.1	2.85
LH1088	BL588		8X8				42.25	133.4	169.5	3.50
LH1222	BL622	19050	2X2	1811	3.25	7.92	17.17	48.9	63.6	1.45
LH1223	BL623		2X3				20.48	48.9	63.6	1.80
LH1234	BL634		3X4				27.08	75.6	102.8	2.50
LH1244	BL644		4X4				30.38	97.9	120.9	2.90
LH1246	BL646		4X6				36.99	97.9	120.9	3.60
LH1266	BL666		6X6				43.60	146.8	190.8	4.30
LH1288	BL688		8X8				56.81	195.7	238.8	5.80
LH1622	BL822	25400	2X2	2400	4.00	9.53	20.98	84.5	108.2	2.20
LH1623	BL823		2X3				25.03	84.5	108.2	2.70
LH1634	BL834		3X4				33.13	129.0	170.0	3.80
LH1644	BL844		4X4				37.18	169.0	214.6	4.30
LH1646	BL846		4X6				45.28	169.0	214.6	5.40
LH1666	BL866		6X6				53.38	253.6	324.5	6.50
LH1688	BL888		8X8				69.58	338.1	432.7	8.60
LH2022	BL1022	3175	2X2	3018	4.80	11.10	24.97	115.6	150.8	3.40
LH2023	BL1023		2X3				29.83	115.6	150.8	4.30
LH2034	BL1034		3X4				39.53	182.4	231.6	6.00
LH2044	BL1044		4X4				44.39	231.3	291.4	6.90
LH2046	BL1046		4X6				54.09	231.3	291.4	8.60
LH2066	BL1066		6X6				63.80	347.0	430.3	10.30
LH2088	BL1088		8X8				83.21	462.6	555.1	13.80
LH2422	BL1222	3810	2X2	3620	5.60	12.70	28.32	151.2	192.0	4.6
LH2423	BL1223		2X3				33.96	151.2	192.0	5.8
LH2434	BL1234		3X4				45.24	244.6	315.9	8.1
LH2444	BL1244		4X4				50.88	302.5	381.1	9.3
LH2446	BL1246		4X6				62.16	302.5	381.1	11.6
LH2466	BL1266		6X6				73.44	453.7	543.6	13.9
LH2488	BL1288		8X8				96.00	605.0	726.0	18.6
LH2822	BL1422	4445	2X2	4224	6.55	14.29	33.55	191.3	225.7	6.1
LH2823	BL1423		2X3				40.16	191.3	225.7	7.6
LH2834	BL1434		3X4				53.37	315.8	372.6	10.6
LH2844	BL1444		4X4				59.97	382.6	451.2	12.2
LH2846	BL1446		4X6				73.18	382.6	451.2	15.2
LH2866	BL1466		6X6				86.39	578.3	682.4	18.2
LH2888	BL1488		8X8				112.8	765.1	902.8	24.3
LH3222	BL1622	5080	2X2	4800	7.50	17.46	37.9	289.1	341.1	8.0
LH3223	BL1623		2X3				45.45	289.1	341.1	10.0
LH3234	BL1634		3X4				60.55	440.4	519.6	14.0
LH3244	BL1644		4X4				68.1	578.3	680.4	16.0
LH3246	BL1646		4X6				83.2	578.3	680.4	20.0
LH3266	BL1666		6X6				98.3	857.4	1000.7	24.0
LH3288	BL1688		8X8				128.5	1156.5	1364.6	32.0
LH4022	BL2022	6350	2X2	6033	9.91	23.81	51.74	433.7	511.7	15.8
LH4023	BL2023		2X3				61.70	433.7	511.7	19.8
LH4034	BL2034		3X4				81.61	649.4	766.2	27.7
LH4044	BL2044		4X4				91.57	867.4	1023.5	31.6
LH4046	BL2046		4X6				111.48	867.4	1023.5	39.5
LH4066	BL2066		6X6				131.39	1301.1	1535.2	47.4
LH4088	BL2088		8X8				171.22	1734.8	2046.5	63.2

■ Leaf chains 板式链

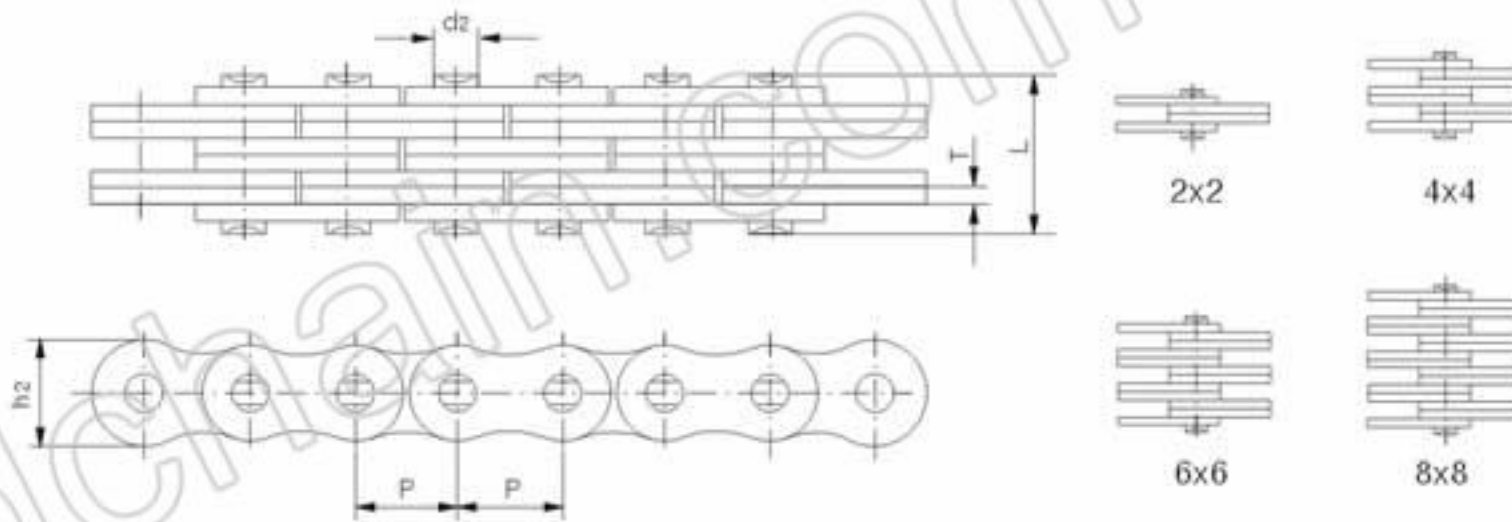


ISO 链号 ISO Chain No.	节距 Pitch	链板组合 Chain lacing	链板高度 Plate depth	链板厚度 Plate thickness	销轴直径 Pin diameter	销轴长度 Pin length	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米重量 Weight per meter
	P		h_2 max	T max	d_z max	L max	Q min	Q_0	q
	mm		mm	mm	mm	mm	KN	KN	Kg/m
LL0822	12 700	2X2	10.60	1.30	4.45	7.6	17.8	20.4	0.35
LL0844		4X4				15.8	36.4	40.7	0.84
LL0866		6X6				18.2	44.5	50.9	1.00
LL0888		8X8				23.5	62.2	71.2	1.33
LL1022	15 875	2X2	13.70	1.60	5.08	9.2	22.3	25.5	0.54
LL1044		4X4				15.8	44.5	51.0	1.06
LL1066		6X6				22.1	66.7	76.3	1.57
LL1088		8X8				28.8	89.0	101.9	2.10
LL1222	19 050	2X2	15.00	1.85	5.72	10.4	28.9	33.2	0.73
LL1244		4X4				17.9	57.8	66.4	1.44
LL1266		6X6				25.4	86.7	99.7	2.15
LL1288		8X8				32.9	115.6	132.9	2.84
LL1622	25 400	2X2	21.00	3.10	8.28	17.2	58.0	66.7	1.52
LL1644		4X4				29.6	116.0	140.0	2.90
LL1666		6X6				42.4	174.0	208.6	4.30
LL1688		8X8				55.4	232.0	278.0	5.71
LL2022	31 750	2X2	26.40	3.70	10.19	20.1	95.0	109.2	2.33
LL2044		4X4				35.4	190.0	218.5	4.40
LL2066		6X6				50.1	285.0	324.6	6.79
LL2088		8X8				65.1	380.0	435.1	8.90
LL2422	38 100	2X2	33.20	5.00	14.63	28.4	170.0	195.5	4.47
LL2444		4X4				46.3	340.0	380.8	8.22
LL2466		6X6				66.4	510.0	571.2	12.22
LL2488		8X8				86.6	680.0	775.2	16.30
LL2822	44 450	2X2	37.08	6.00	15.90	32.2	200.0	224.0	5.10
LL2844		4X4				56.4	400.0	448.0	9.90
LL2866		6X6				80.8	600.0	672.0	14.60
LL2888		8X8				105.2	800.0	896.0	19.40
LL3222	50 800	2X2	42.00	6.00	17.81	33.2	260.0	291.2	5.80
LL3244		4X4				56.6	520.0	582.4	12.30
LL3266		6X6				80.8	780.0	873.6	18.30
LL3288		8X8				105.0	1050.0	1176.0	24.00
LL4022	63 500	2X2	52.76	8.25	22.89	44.7	360.0	403.2	10.30
LL4044		4X4				77.9	780.0	873.6	20.00
LL4066		6X6				111.1	1080.0	1209.6	30.00
LL4088		8X8				145.5	1560.0	1747.2	39.10
LL4822	76 200	2X2	63.88	10.30	29.24	56.1	560.0	627.2	18.50
LL4844		4X4				97.4	1120.0	1254.4	35.70
LL4866		6X6				138.9	1680.0	1881.6	53.00
LL4888		8X8				182.4	2240.0	2508.8	70.40


■ Leaf chains 板式链

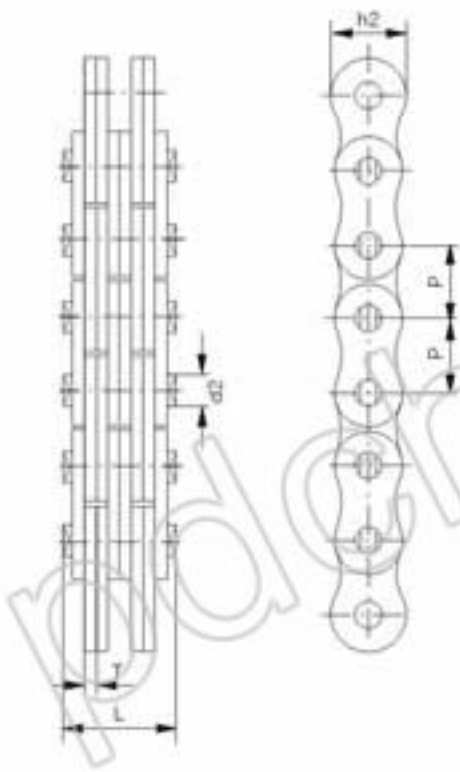


链板组合
Plates lacing

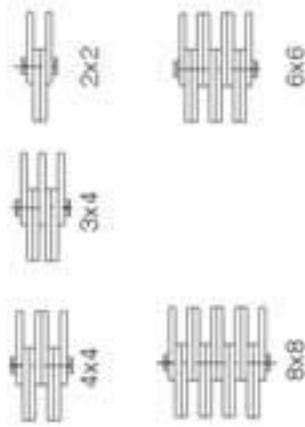

ANSI 链号 ANSI Chain No	节距 Pitch	链板组合 Chain lacing	链板高度 Plate depth	链板厚度 Plate thickness	销轴直径 Pin diameter	销轴长度 Pin length	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P		h ₂ max	T max	d ₂ max	L max	Q min	Q ₀	q
	mm		mm	mm	mm	mm	KN	KN	Kg/m
AL322	9.525	2X2	7.7	1.30	3.58	6.90	9.00	10.2	0.23
AL344		4X4				11.6	18.0	20.0	0.46
AL422	12.700	2X2	10.4	1.50	3.96	8.10	14.10	16.9	0.39
AL444		4X4				14.20	28.20	35.2	0.74
AL466		6X6				20.30	42.30	52.7	1.13
AL522	15.875	2X2	13.0	2.03	5.08	10.8	22.00	27.5	0.64
AL534		3X4				17.00	33.00	46.0	1.10
AL544		4X4				19.10	44.00	55.0	1.25
AL566		6X6				26.90	66.00	82.5	1.79
AL622	19.050	2X2	15.6	2.42	5.94	12.40	37.00	44.4	0.88
AL644		4X4				22.40	66.70	78.8	1.76
AL666		6X6				32.40	100.10	118.6	2.60
AL688		8X8				42.20	133.40	156.6	3.49
AL822		2X2				16.00	56.70	68.6	1.54
AL844	25.400	4X4	20.5	3.25	7.92	29.40	113.40	135.6	3.00
AL866		6X6				44.20	170.00	202.3	4.46
AL1022	31.750	2X2	25.9	4.00	9.53	20.80	88.50	107.1	2.37
AL1044		4X4				37.10	177.00	203.6	4.68
AL1066		6X6				53.20	265.00	315.3	7.20
AL1088		8X8				69.40	354.00	421.2	9.94
AL1222	38.100	2X2	30.5	4.80	11.10	24.30	127.00	151.1	3.65
AL1244		4X4				43.80	254.00	299.7	7.05
AL1266		6X6				63.20	381.00	426.3	10.50
AL1288	8X8	82.60	508.00	598.4	14.03				
AL1444	44.450	4X4	36.4	5.60	12.64	51.30	372.70	413.6	10.34
AL1466		6X6				74.56	559.00	620.4	15.16
AL1644	50.800	4X4	41.2	6.40	14.27	58.00	471.00	522.8	12.98
AL1666		6X6				83.80	706.00	783.6	19.76
AL1688		8X8				109.50	942.0	1045.5	25.47

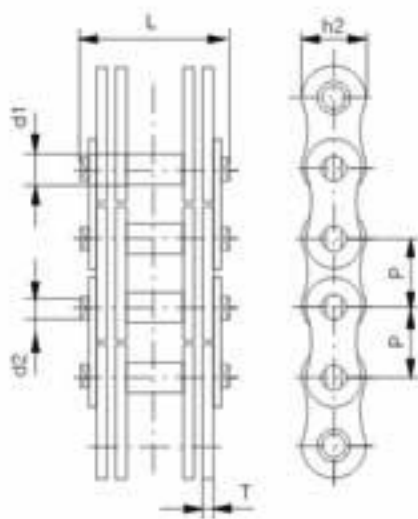

链板组合
Plates lacing

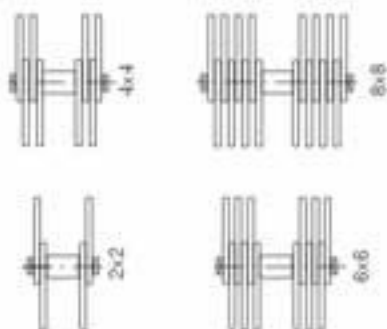


链号 Chain No	节距 Pitch	内节内宽 Width between inner plates	链板组合 Plate lacing	销轴直径 Pin diameter		销轴长度 Pin length	链板长度 Plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	b ₁ min		d ₁ max	d ₂ max	L max	h ₂ max	T max	Q min	q
	mm	mm		mm	mm	mm	mm	mm	KN	Kg/m
MP15	15	12	2X2	5	5	25	12	2.03	5.0	0.7
MP20	20	15	2X2	8	8	28	15	2.03	12.5	1.1
MP25	25	18	2X2	10	10	36	18	3	25.0	1.8
MP30	30	20	4X4	11	11	51	20	3	40.0	3.4
MP35	35	22	4X4	12	12	53	26	3	60.0	4.5
MP40	40	25	4X4	14	14	58	32	3	80.0	5.0
MP45	45	30	4X4	17	17	63	35	3	100.0	7.0
MP50	50	35	4X4	22	22	90	40	4.5	150.0	11.3
MP55	55	40	4X4	24	24	108	42	6.0	200.0	14.5
MP60	60	45	4X4	26	26	114	46	6.0	250.0	17.1
MP70	70	50	6X6	32	32	148	55	6.0	375.0	34.0
MP80	80	60	6X6	36	36	159	60	6.0	500.0	39.0
MP90	90	70	6X6	40	40	184	70	7.0	750.0	53.0
MP100	100	80	8X8	45	45	224	80	7.0	1000.0	77.0
MP110	110	90	8X8	50	50	236	90	7.0	1250.0	90.0
MP120	120	100	8X8	55	55	262	100	8.0	1500.0	112.0


Horsepower rating graph 功率曲线表

For drive Z1 = 19 teeth
Chain length 120 links/Ratio i=3
Service life: 15000 hours

A系列滚子链
A series roller chains

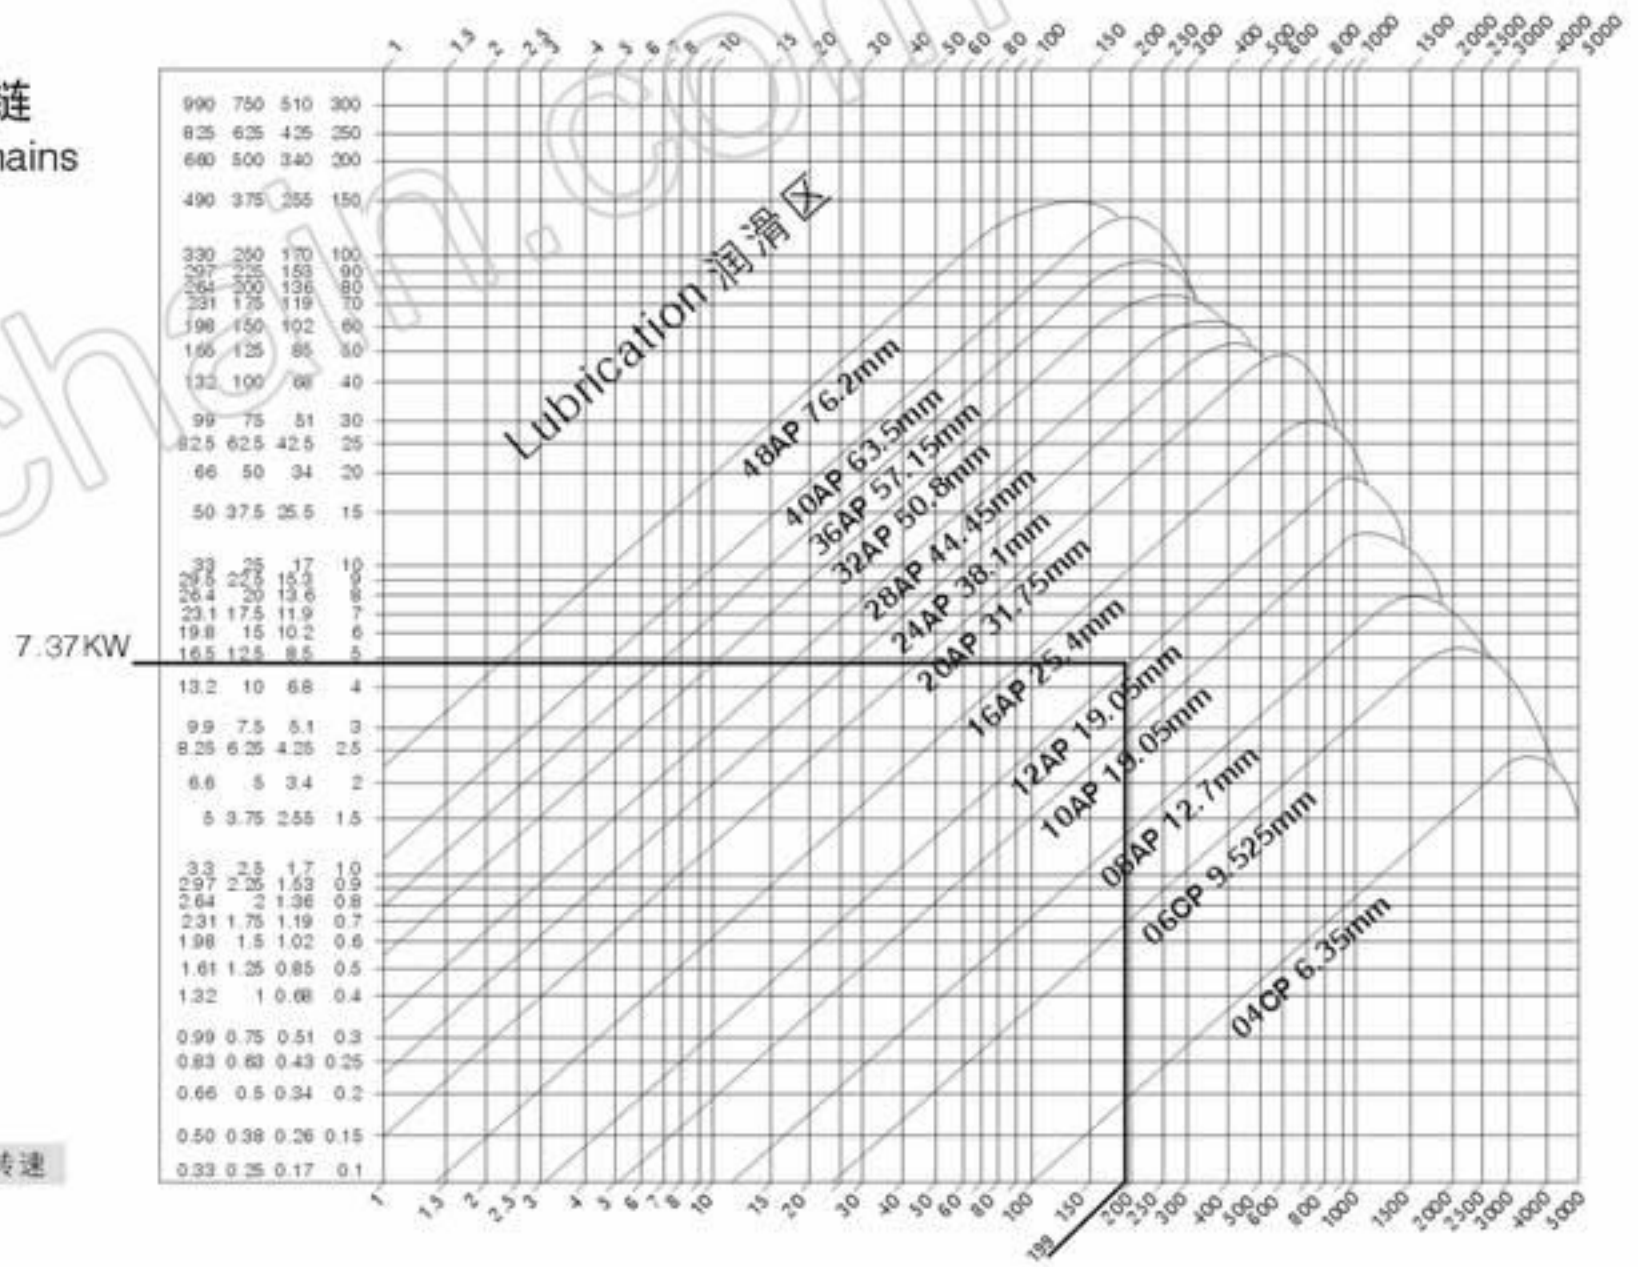

B系列滚子链
B series roller chains

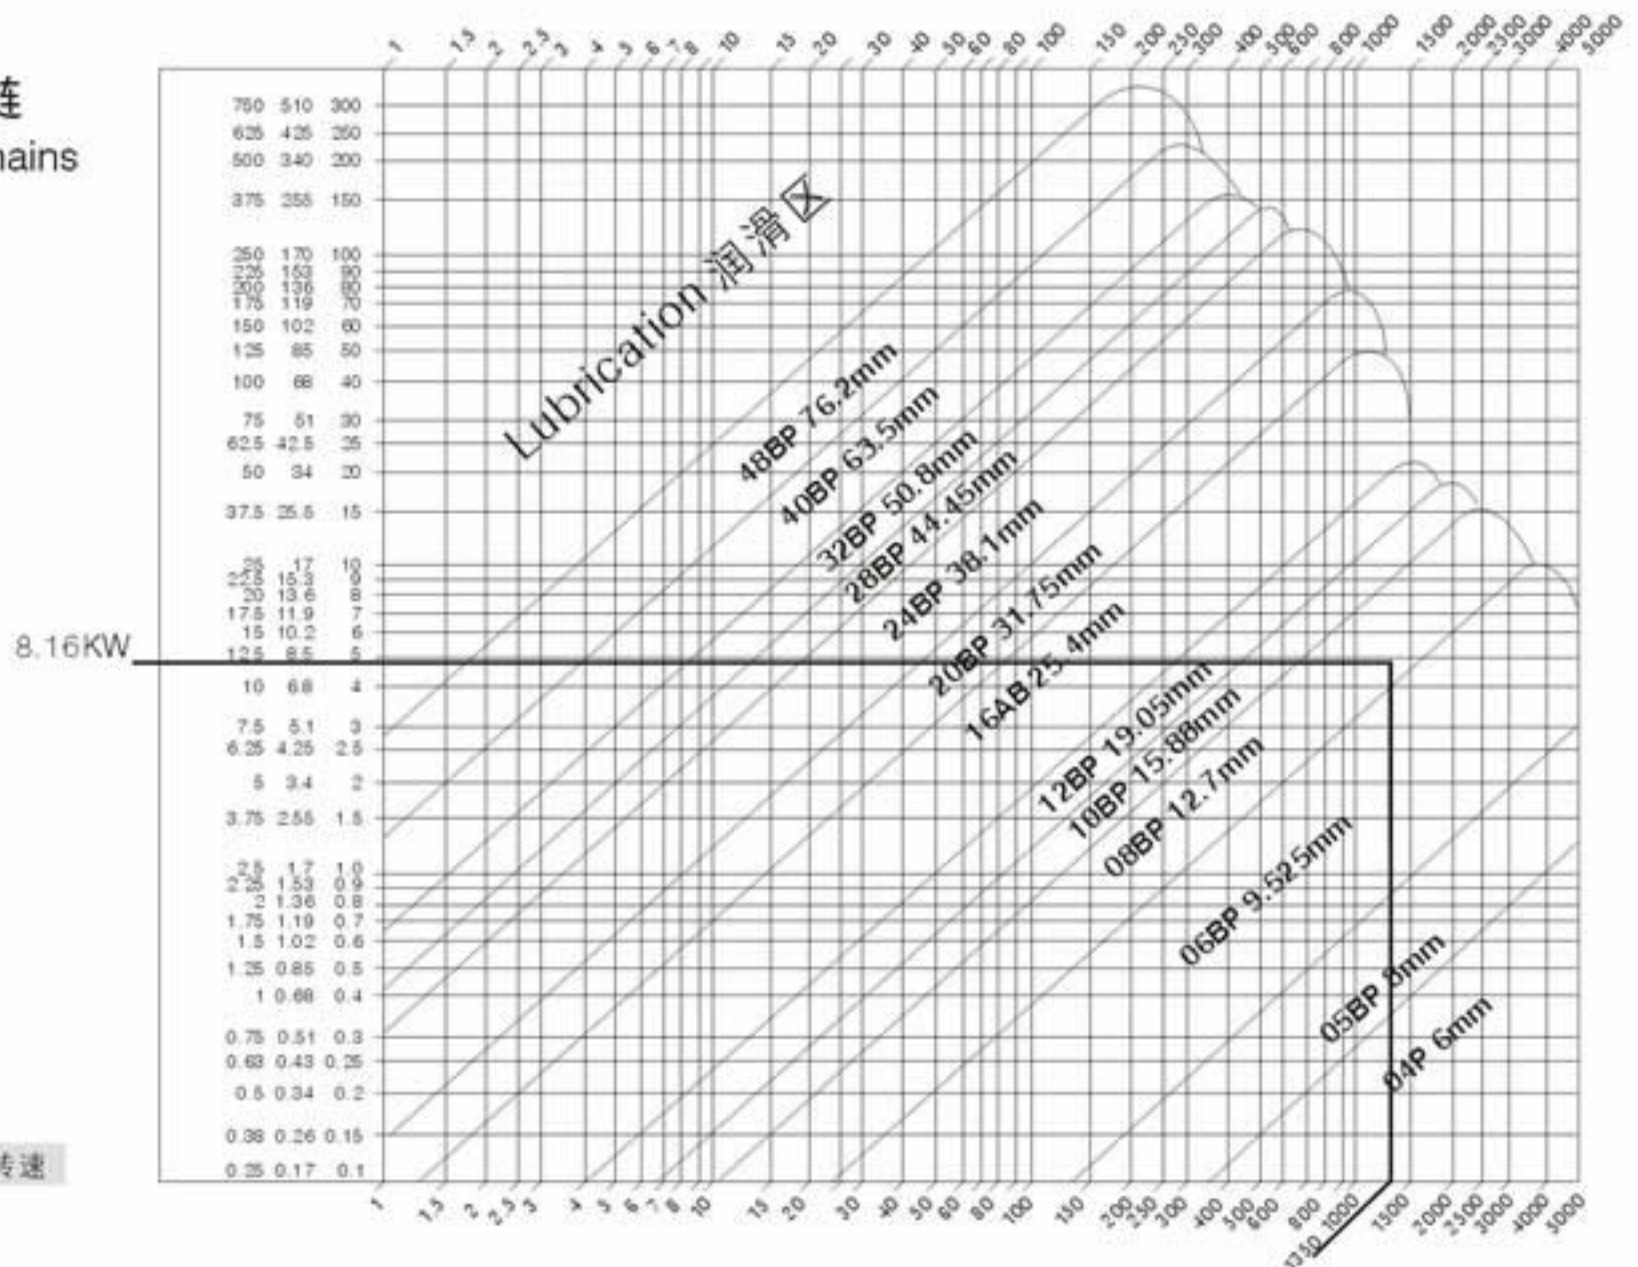

pdchain.com



PowerDrive China Manufacturing Co., Ltd

Add:

Factory: 30 Bei An Road, San Yi Cun, Ding Qiao, HangZhou, 310004, China

Office: 3rd floor, Building 16, Xi Dou Men Industrial Park, No.22 Xi Dou Men Road, Hangzhou, 310012, China

Tel: 86-571-85865398, 8586 5055 Fax: 0571-85865066

Email: sales@pdchain.com sales@powerdrive.cn

<http://www.pdchain.com> www.powerdrive.cn

杭州永昌链传动有限公司

工厂: 杭州市丁桥镇三义村北岸路30号

电话: 86-571-88115008 传真: 86-571-88115018

Email: info@pdchain.com <http://www.pdchain.com>

杭州永昌传动机械有限公司

杭州市西斗门路西斗门工业园16幢B座3楼(310012)

电话: 86-571-8586 5055(四线) 8539 4068

传真: 86-571-8586 5066 8539 4069

Email: inquiry@powerdrive.cn www.powerdrive.cn